



Low Noise Type Solenoid Controlled Relief Valve

DAIWER

Low Noise Type Solenoid Controlled Relief Valve

JIS Graphical Symbol



Model Number Designation

SBS G—03—1PN—R

DIRECTION OF KNOB
R : RIGHT (P PORT SIDE)
L : LEFT (T PORT SIDE)

1PN : NORMALLY VENTED
1NP : ENERGIZED TO VENT

VALVE SIZE
03 : 3/8"
06 : 3/4"
10 : 1-1/4"

MOUNTING
G : SUB-PLATE MOUNTING

LOW NOISE TYPE PILOT OPERATED RELIEF VALVES


Ratings

MODEL	MAX. PRESSURE kgf/cm ²	PRESSURE ADJ. RANGE kgf/cm ²	MAX. FLOW LPM	WEIGHT kg
SBSG-03-※-※	250	5-250	100	4.8
SBSG-06-※-※			200	5.9
SBSG-10-※-※			400	11.3

Mounting Bolt (Attachment)

MODEL NO.	SOC HOL CAP SCREW
SBSG-03	M12x40L.....4PCS
SBSG-06	M16x45L.....4PCS
SBSG-10	M20x60L.....4PCS

■ SBSG-03.06.10-1PN/1NP-R

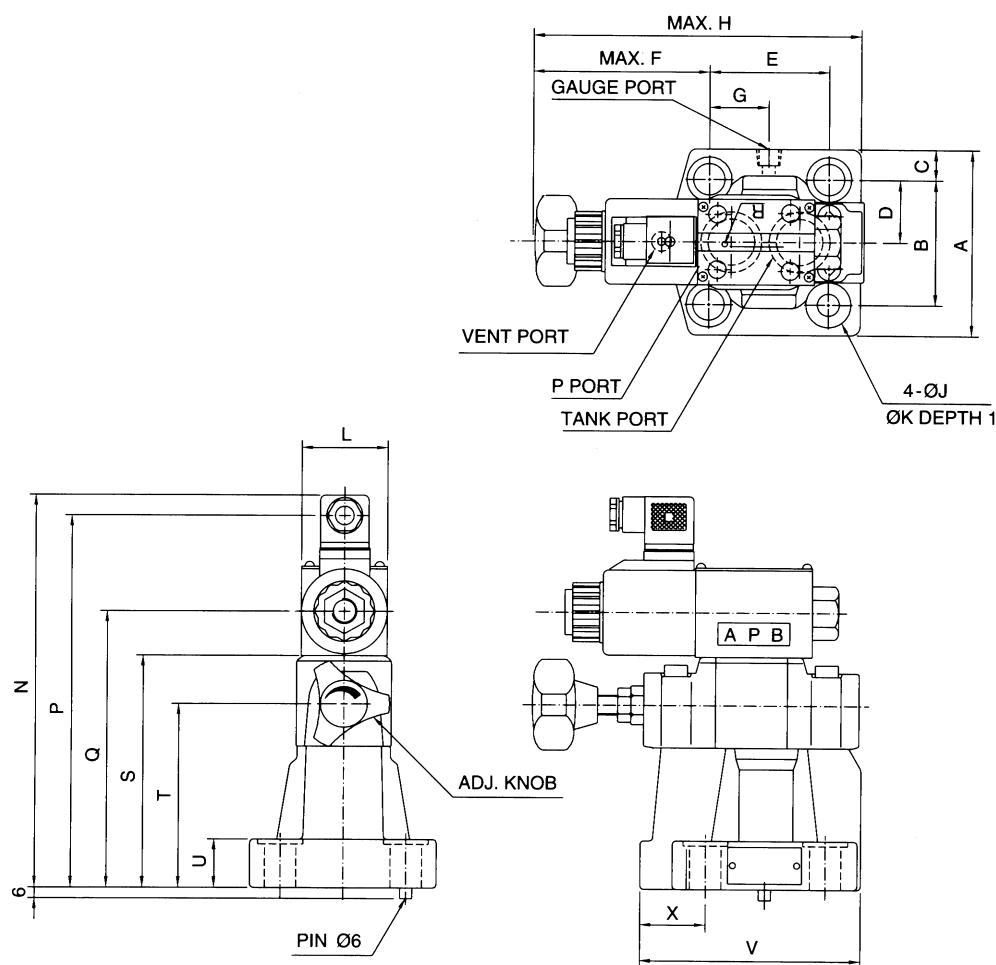

MODEL	A	B	C	D	E	F	G	H	J
SBSG-03-※-※-※-※	76	53.8	11.1	26.9	53.8	96	27	180	13.5
SBSG-06-※-※-※-※	104	70	17	35	66.7	98.8	33.7	180	17.5
SBSG-10-※-※-※-※	120	82.6	18.7	41.3	88.9	100	44.9	182	21.5

MODEL	K	L	N	P	Q	S	T	U	V
SBSG-03-※-※-※-※	21	48	220.5	206.8	157	132	104	22	106
SBSG-06-※-※-※-※	25	48	220.5	206.8	157	132	104	27	123
SBSG-10-※-※-※-※	32	65	247.5	237.5	191.5	167	135	33.5	155