



### Unloading Relief Valve

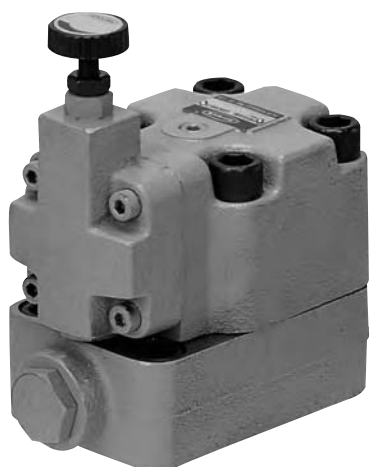

**BUCG-06**

### JIS Graphical Symbol

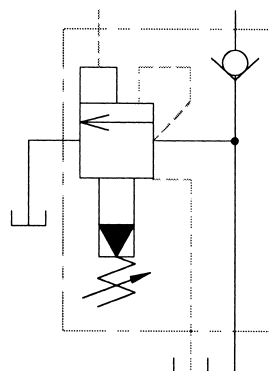

### Model Number Designation

**BUCG - 06 - ※**

Series Number \_\_\_\_\_

Type of Connection \_\_\_\_\_

T: Threaded connection  
G: Sub-Plate Mounting

Valve Size \_\_\_\_\_

Pressure Adjustment Range (kgf/cm<sup>2</sup>) \_\_\_\_\_

B: 8~70  
H: 8-250

### Mounting Bolt (Attachment)

| Valve Model No. | Socket Head Cap Screw | Qty. |
|-----------------|-----------------------|------|
| BUCG-06         | M16X55 Lg             | 2    |
|                 | M16X110 Lg            | 2    |
|                 | M16X130 Lg            | 2    |

### Ratings

| Valve Model No. | Max. Pressure           | Pressure Adjustment Range | Max.Flow l/min | Piping Size Rc | Mass kg |
|-----------------|-------------------------|---------------------------|----------------|----------------|---------|
| BUCG-06         | 250 kgf/cm <sup>2</sup> | B: 8-70<br>H: 8-250       | 125            | 3/4"           | 12      |

## Unloading Relief Valve

**DAIWER**

### ■ BUCG-06

