



Solenoid Operated Flow Controlled Valve

DAIWER


Solenoid Operated Flow Controlled Valve JIS Graphical Symbol




SF-G06/G10




THF-G06/G10




SD-G06/G10



SDF-G06/G10



SKF-G06



SFD-G06/G10

Model Number Designation

SF G-06-E-T

T : EXTERNAL DRAIN
E : EXTERNAL PILOT
VALVE SIZE
06 : 3/4"
10 : 1-1/4"
G : SUBPLATE MOUNTED
MODEL:
SF
SDF
THF
SFD
SD
SKF (ONLY G06 AVAILABLE)


Mounting Bolt (Attachment)

MODEL NO.	SOC HOL CAP SCREW
SF-06	M10x45L.....4PCS
SF-10	M12x45L.....4PCS

Ratings

MODEL	MAX. OPERATED PRESSURE kgf/cm ²	MAX. FLOW LPM l/min	PILOT VALVE	WEIGHT kg
SF - G06	210	120	02N-2B2L	6.4
SDF-G06			02N-2B2	6.4
THF-G06				5.0
SD - G06			02N-2B2	6.1
SFD-G06			02N-2B2L	6.7
SKF-G06			02N-304	7.5
SF - G10		240	02N-2B2L	9.9
SDF-G10			02N-2B2	9.9
THF-G10				8.4
SD -G10			02N-2B2	9.4
SFD-G10		240	02N-2B2L	10.4

■ SF-G06/G10

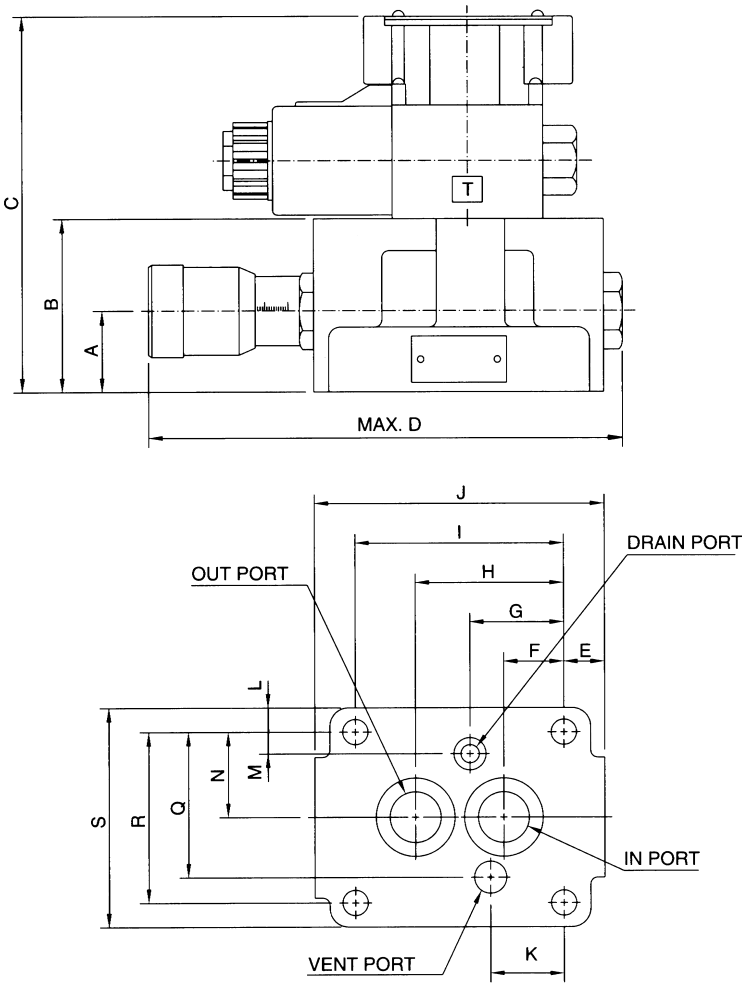

MODEL	A	B	C	D	E	F	G
SF-G06	35	75	162.5	209	17.5	26	40.5
SF-G10	40	86	173.5	248	19	34	47


MODEL	H	I	J	K	L	M	N
SF-G06	64	90	125	31.7	10.5	9.5	37
SF-G10	78	112	150	37.9	14.5	16	43

MODEL	Q	R	S
SF-G06	63	74	95
SF-G10	76	86	115

Solenoid Operated Flow Controlled Valve

DAIWER

■ SDF-G06/G10

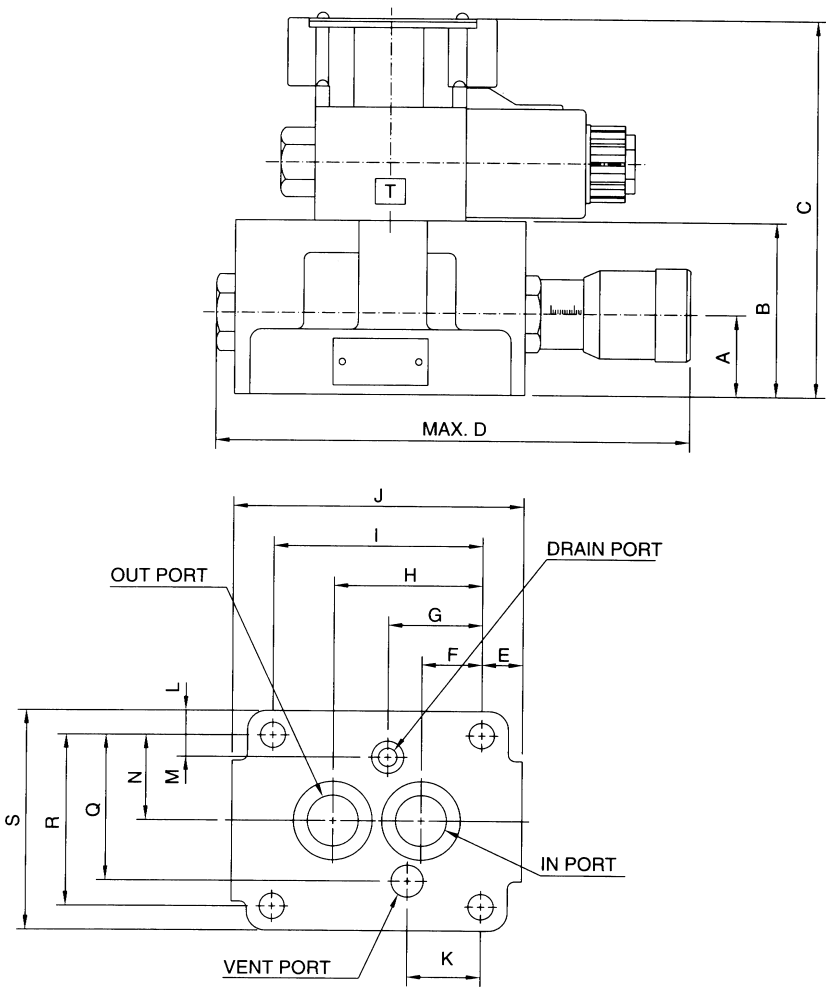

MODEL	A	B	C	D	E	F	G
SDF-G06	35	75	162.5	209	17.5	26	40.5
SDF-G10	40	86	173.5	248	19	34	47


MODEL	H	I	J	K	L	M	N
SDF-G06	64	90	125	31.7	10.5	9.5	37
SDF-G10	78	112	150	37.9	14.5	16	43

MODEL	Q	R	S
SDF-G06	63	74	95
SDF-G10	76	86	115

Solenoid Operated Flow Controlled Valve

DAIWER

THF-G06/G10

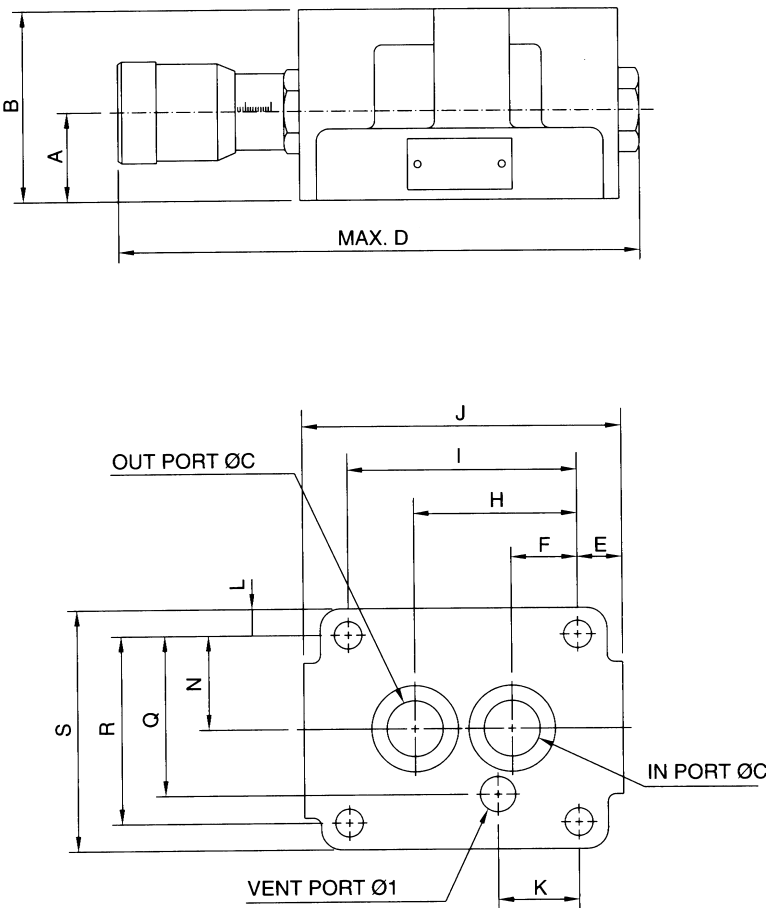


MODEL	A	B	C	D	E	F	H
THF-G06	35	75	Ø 26	209	17.5	26	64
THF-G10	40	86	Ø 29	248	19	34	78

MODEL	I	J	K	L	N	Q	R
THF-G06	90	125	31.7	10.5	37	63	74
THF-G10	112	150	37.9	14.5	43	76	86

MODEL	S
THF-G06	95
THF-G10	115

■ SD-G06/G10

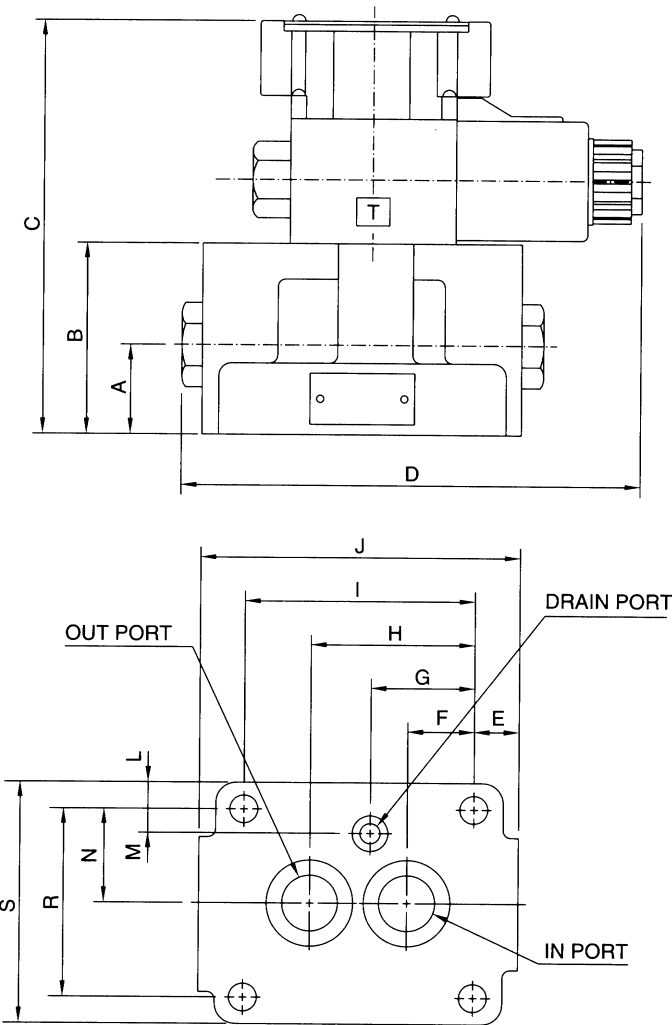

MODEL	A	B	C	D	E	F	G
SD-G06	35	75	162.5	180	17.5	26	40.5
SD-G10	40	86	173.5	197	19	34	47


MODEL	H	I	J	L	M	N	R
SD-G06	64	90	125	10.5	9.5	37	74
SD-G10	78	112	150	14.5	16	43	86

MODEL	S
SD-G06	95
SD-G10	115

Solenoid Operated Flow Controlled Valve

DAIWER

■ SFD-G06/G10

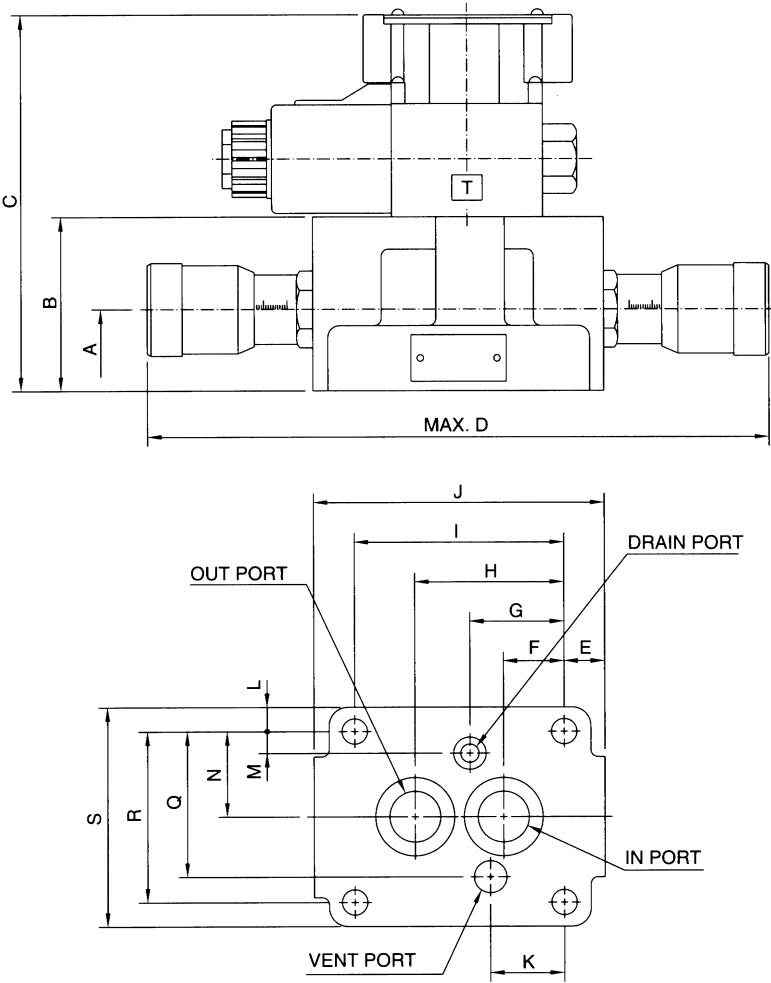


MODEL	A	B	C	D	E	F	G
SFD-G06	35	75	162	277	17.5	26	40.5
SFD-G10	40	86	173.5	328	19	34	47

MODEL	H	I	J	K	L	M	N
SFD-G06	64	90	125	31.7	10.5	9.5	37
SFD-G10	78	112	150	37.9	14.5	16	43

MODEL	Q	R	S
SFD-G06	63	74	95
SFD-G10	76	86	115

■ SKF-G06

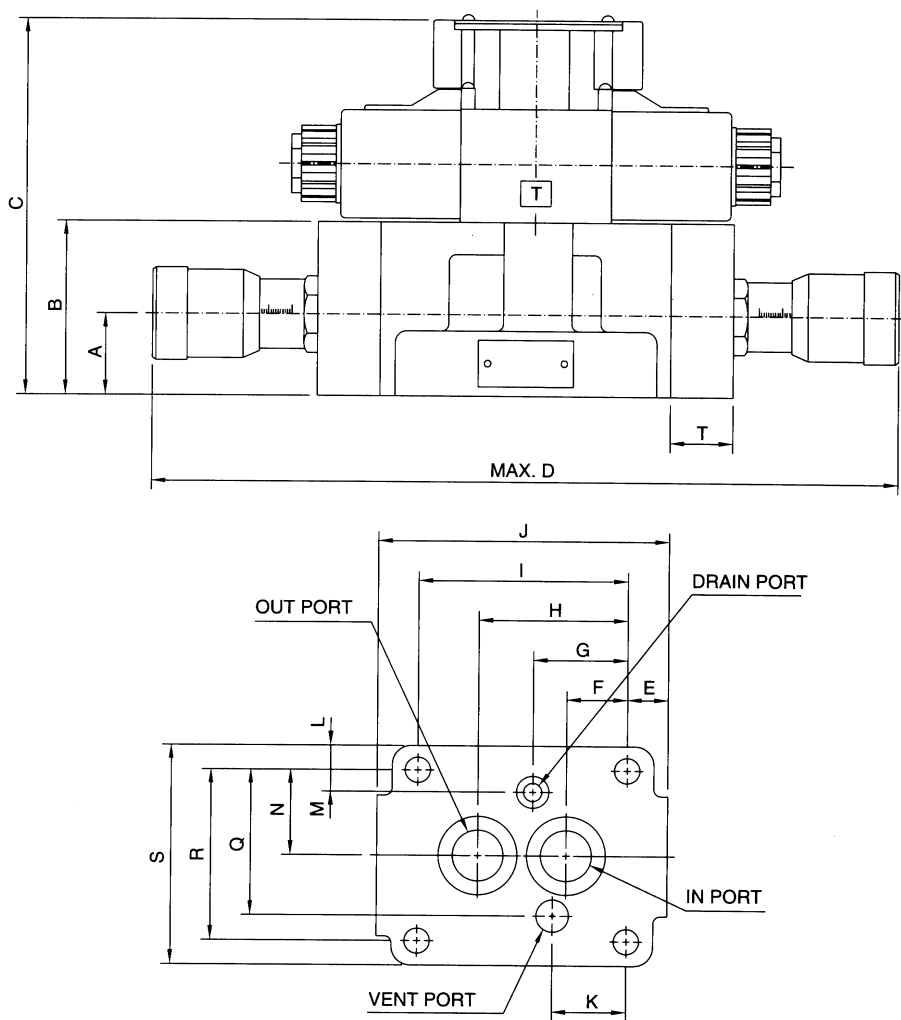

MODEL	A	B	C	D	E	F	G
SKF-G06	35	75	162.5	315	17.5	26	40.5

MODEL	H	I	J	K	L	M	N
SKF-G06	64	90	125	31.7	10.5	9.5	37

MODEL	Q	R	S	T
SKF-G06	63	74	95	27