


### Pilot Controlled Check Valve




CPT-03

### JIS Graphic Symbol



Internal Drain Type




External Drain Type



CPDT-03

### Model Number Designation

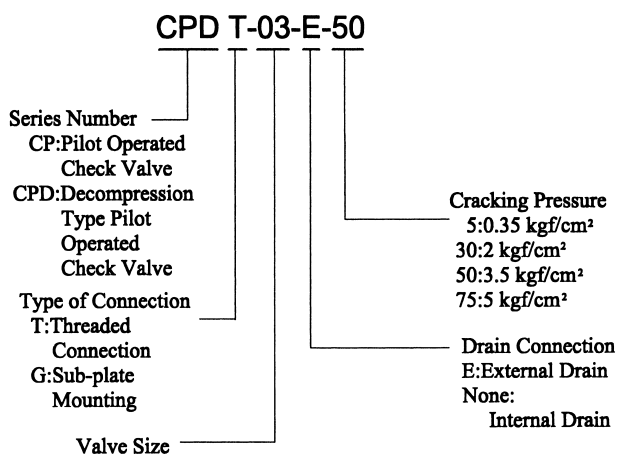

### Mounting Bolts (Attacment)

| Model No. | Socket Head Cap Screw | Qty. |
|-----------|-----------------------|------|
| CP-※-G-03 | M10X45 Lg             | 4    |
| CP-※-G-06 | M10X50 Lg             | 4    |
| CP-※-G-10 | M10X55 Lg             | 6    |


### Ratings

| Valve Size | Model No.        |                  | Rated Flow l/min | Cracking Pressure kgf/cm <sup>2</sup> | Mass kg  |           |
|------------|------------------|------------------|------------------|---------------------------------------|----------|-----------|
|            | Threaded         | Sub-plate        |                  |                                       | Threaded | Sub-plate |
| 3/8        | CP-※-T-03-※-※-20 | CP-※-G-03-※-※-20 | 50               | 0.35, 5<br>3.5, 5                     | 3.4      | 4.5       |
| 3/4        | CP-※-T-06-※-※-20 | CP-※-G-06-※-※-20 | 125              |                                       | 5.2      | 7         |
| 1 1/4      | CP-※-T-10-※-※-20 | CP-※-G-10-※-※-20 | 315              |                                       | 11.6     | 12        |

## Pilot Controlled Check Valve


DAIWER

## ■ CPT-03, CPDT-06

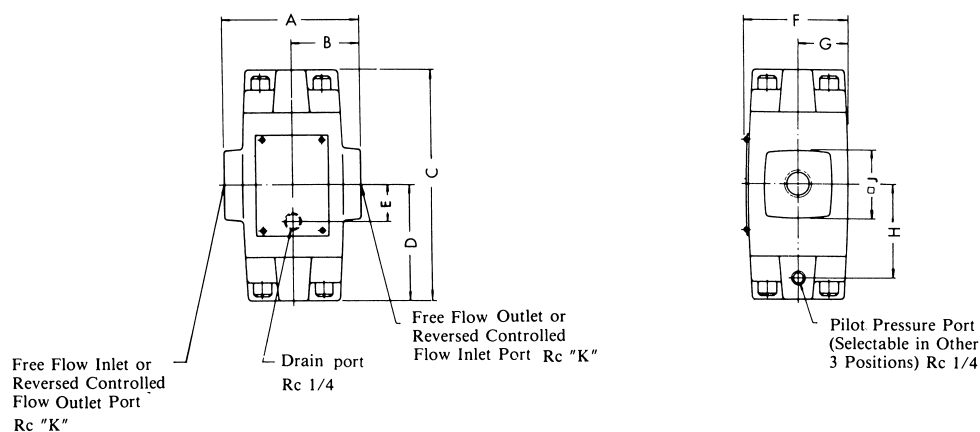

| Model No. | A   | B  | C   | D   | E  | F  | G  | H  | J  | K     |
|-----------|-----|----|-----|-----|----|----|----|----|----|-------|
| CP-✱-T-03 | 80  | 40 | 144 | 72  | 21 | 66 | 32 | 58 | 36 | 3/8   |
| CP-✱-T-06 | 96  | 48 | 168 | 84  | 26 | 78 | 38 | 70 | 60 | 3/4   |
| CP-✱-T-10 | 140 | 70 | 208 | 104 | 35 | 92 | 45 | 84 | 79 | 1 1/4 |

## ■ CPG-03, CPDG-06

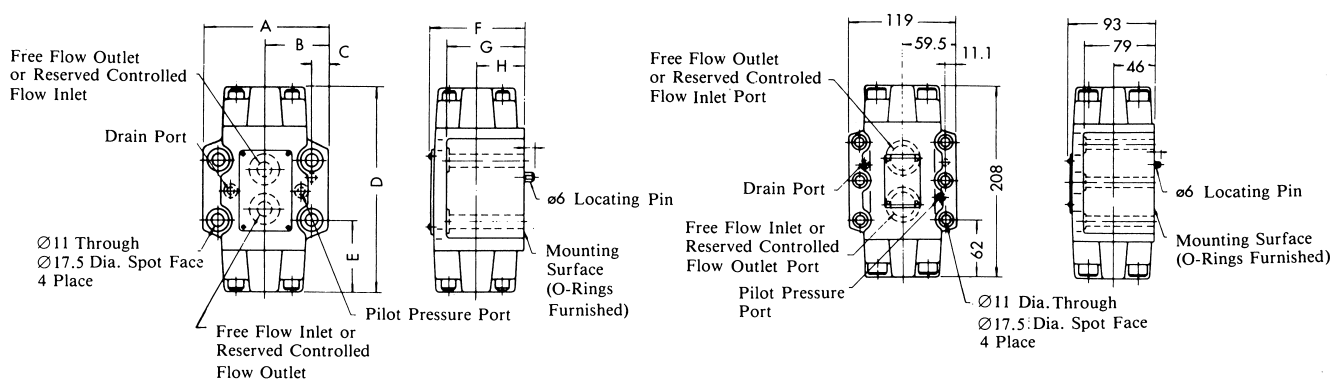

| Model No. | A   | B    | C    | D   | E    | F  | G  | H  |
|-----------|-----|------|------|-----|------|----|----|----|
| CP-✱-G-03 | 89  | 44.5 | 11.1 | 144 | 50.6 | 68 | 59 | 35 |
| CP-✱-G-06 | 102 | 51   | 11.3 | 168 | 54   | 80 | 69 | 40 |

## ■ CPI-03, 04

