




Pressure Switch

DAIWER

■ Pressure Switch

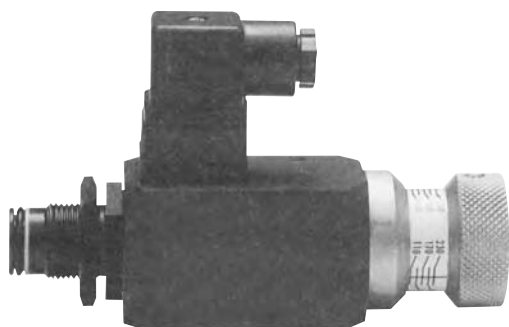

■ JIS Graphical Symbol



■ Model Number Designation

DPC - 100 - 10

DESIGN NO.

PRESSURE ADJUSTING RANGE


040: 6-40 kgf/cm² 100: 15-100 kgf/cm²
250 : 40-250 kgf/cm² 360: 50-360 kgf/cm²

MODEL NO.

DPC: DIRECT READ-OUT, MANUAL ADJUSTED
CARTRIDGE TYPE

■ Ratings


MODEL	RATED PRESSURE kgf/cm ²	PRESSURE ADJ. RANGE kgf/cm ²	MAX. PRESSURE kgf/cm ²	WEIGHT kgs
DPC-040	40	6-40	150	1.0
DPC-100	100	15-100	250	1.0
DPC-250	250	40-250	300	1.0
DPC-360	360	50-360	400	1.0

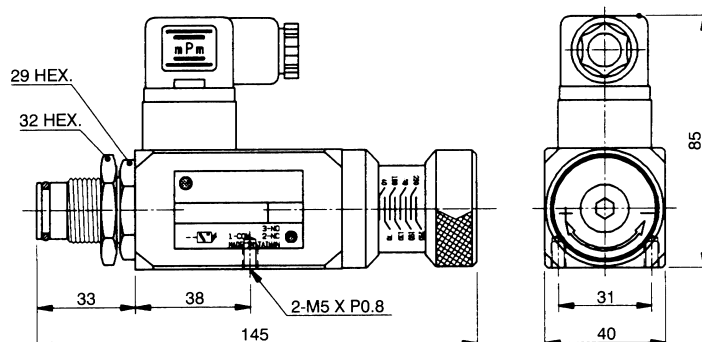


Pressure Switch

DAIWER


Pressure Switch

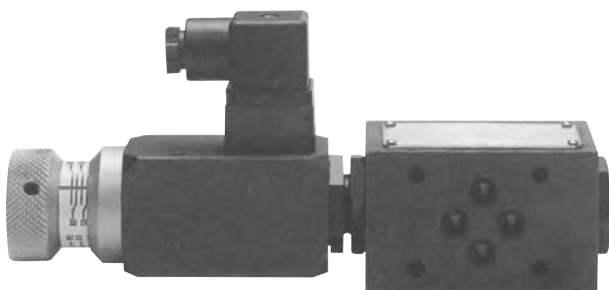


JIS Graphical Symbol




DPM-**-P-**-10



DPM-**-A-**-10



DPM-**-W-**-10



DPM-**-B-**-10

Model Number Designation

DPM — 02 — P — 100 — 10

DESIGN NO.

PRESSURE ADJUSTING RANGE

040: 6-40 kgf/cm² 100: 15-100 kgf/cm²
250 : 40-250 kgf/cm² 360: 50-360 kgf/cm²

PRESSURE TRANSFORM PORT

P: P PORT W: A&B PORT
A: A PORT B: B PORTVALVE SIZE: 02-ISO 03/CETOP 3/NFPA D03
03-ISO 05/CETOP 5/NFPA D05




MODEL NO.

DPM: DIRECT READ-OUT, MANUAL ADJUSTED
MODULAR MOUNTING TYPE


Ratings

MODEL	RATED PRESSURE kgf/cm ²	PRESSURE ADJ. RANGE kgf/cm ²	MAX. PRESSURE kgf/cm ²	RATED FLOW l/min	WEIGHT kgs
DPM-02-* -040	40	6-40	150	35	K,A,B,P : 2.1 W : 3.1
DPM-02-* -100	100	15-100	250		
DPM-02-* -250	250	40-250	300		
DPM-03-* -040	40	6-40	150	70	K,A,B,P : 3.1 W : 4.1
DPM-03-* -100	100	15-100	250		
DPM-03-* -250	250	40-250	300		

DIMENSION(mm)

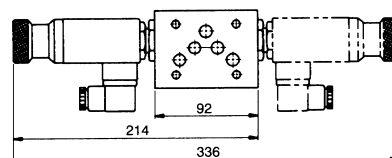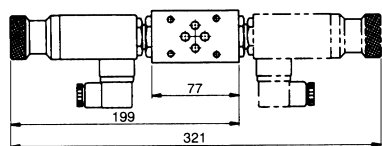

■ Pressure Switch

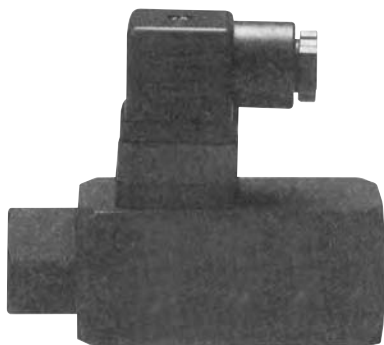

■ Model Number Designation

DPB — 100 — 10

DESIGN NO.

PRESSURE ADJUSTING RANGE


040: 6-40 kgf/cm² 100: 15-100 kgf/cm²
250 : 40-250 kgf/cm² 360: 50-360 kgf/cm²

MODEL NO.


DPB: STANDARD TYPE, HEX KEY ADJUSTED.
THREADED CONNECTING TYPE

■ Ratings

MODEL	RATED PRESSURE kgf/cm ²	PRESSURE ADJ. RANGE kgf/cm ²	MAX. PRESSURE kgf/cm ²	WEIGHT kgs
DPB-040	40	6-40	150	0.6
DPB-070	70	5-70	200	0.6
DPB-150	150	30-150	300	0.6
DPB-250	250	40-250	300	0.6

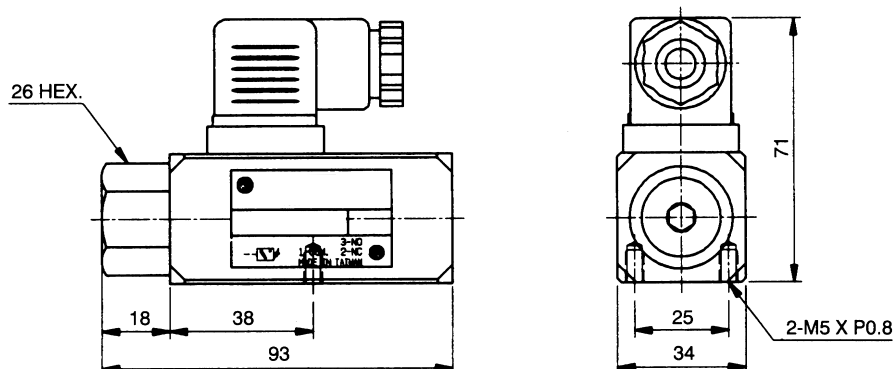

■ Pressure Switch

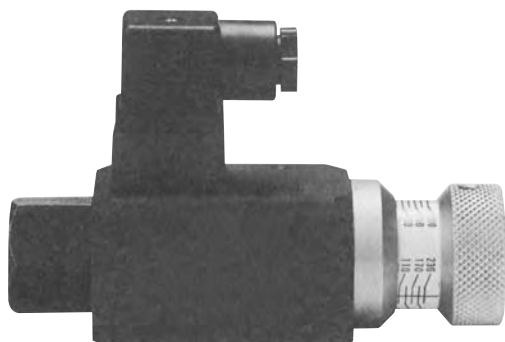

■ Model Number Designation

DPA — 100 — 10

DESIGN NO.

PRESSURE ADJUSTING RANGE

040: 6-40 kgf/cm² 100: 15-100 kgf/cm²


250 : 40-250 kgf/cm² 360: 50-360 kgf/cm²

MODEL NO.

DPA: DIRECT READ-OUT, MANUAL ADJUSTED
THREADED CONNECTING TYPE

■ Ratings


MODEL	RATED PRESSURE kgf/cm ²	PRESSURE ADJ. RANGE kgf/cm ²	MAX. PRESSURE kgf/cm ²	WEIGHT kgs
DPA-040	40	6-40	150	1.0
DPA-100	70	15-100	250	1.0
DPA-250	250	40-250	300	1.0
DPA-360	360	50-360	400	1.0

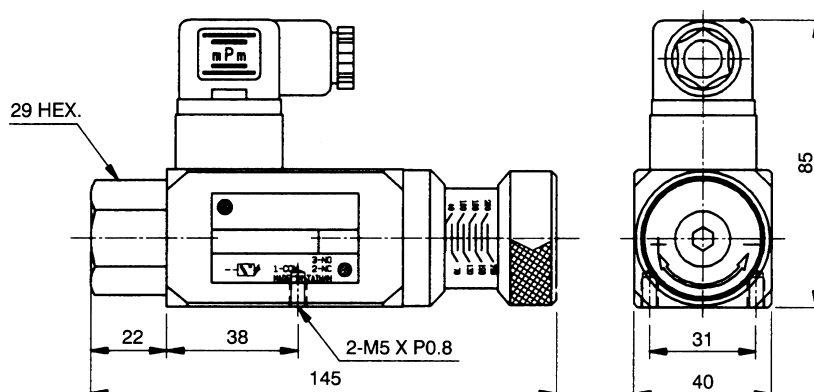

Pressure Switch

DAIWER

■ Pressure Switch

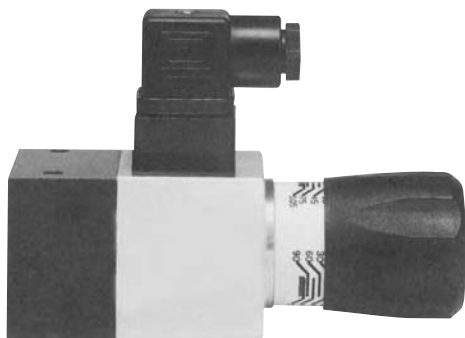

■ Model Number Designation

DPL — 100 — 10

DESIGN NO.

PRESSURE ADJUSTING RANGE

050: 6-50 kgf/cm² 100: 15-100 kgf/cm²200 : 30-200 kgf/cm² 280: 40-280 kgf/cm²400 : 50-400 kgf/cm²

MODEL NO.

DPL: STANDARD TYPE, HEAVY-DUTY MICRO SWITCHES.
THREADED CONNECTING TYPE

■ Ratings

MODEL	RATED PRESSURE kgf/cm ²	PRESSURE ADJ. RANGE kgf/cm ²	MAX. PRESSURE kgf/cm ²	WEIGHT kgs
DPL-050	50	6-50	200	1.0
DPL-100	100	15-100	300	1.0
DPL-200	200	30-200	300	1.0
DPL-280	280	40-280	350	1.0
DPL-400	400	50-400	450	1.0

