



空氣濾清器 Air Breather




型式編號 Model	A PT	B m/m	C m/m	D m/m	E m/m	F m/m	G m/m	流量 Air Flow m ³ /min	過濾精度 Filtration Micron	重量 Weight kg
AB-06	3/4"	18	65	45	37	88	100	0.35	40	0.24
AB-08	1"	25	65	45	34	86	100	0.45	40	0.24
AB-12	1 1/2"	39	92	90	43	143	126	1.7	40	0.56
AB-16	2"	48	92	90	42	140	126	2.1	40	0.58
AB-20	2 1/2"	64	130	120	47	178	170	3.5	40	1.12
AB-24	3"	72	130	120	48	178	170	4.6	40	1.14
AB-32	4"	95	170	140	57	211	215	7.1	40	1.88

油箱清潔窗 Tank End Cover

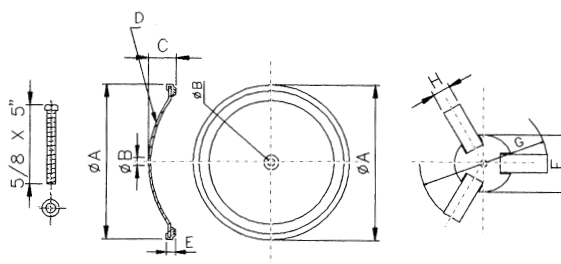


型式編號 Model	φA m/m	B m/m	C m/m	D m/m	E m/m	φF m/m	G m/m	H m/m	切割直徑 Cutting m/m	整組重量 Weight kg
THY-08	210 (8")	16	40	4.5	17	115	182	26.5	160	2.88
THY-10	260 (10")	16	41	4.5	17	115	248	26.5	210	3.70
THY-12	310 (12")	16	47	4.5	17	140	316	26.5	250	5.12
THY-14	367 (14")	16	47	4.5	17	140	368	26.5	300	6.28
THY-18	465 (18")	16	68	4.5	17	140	452	26.5	400	9.12

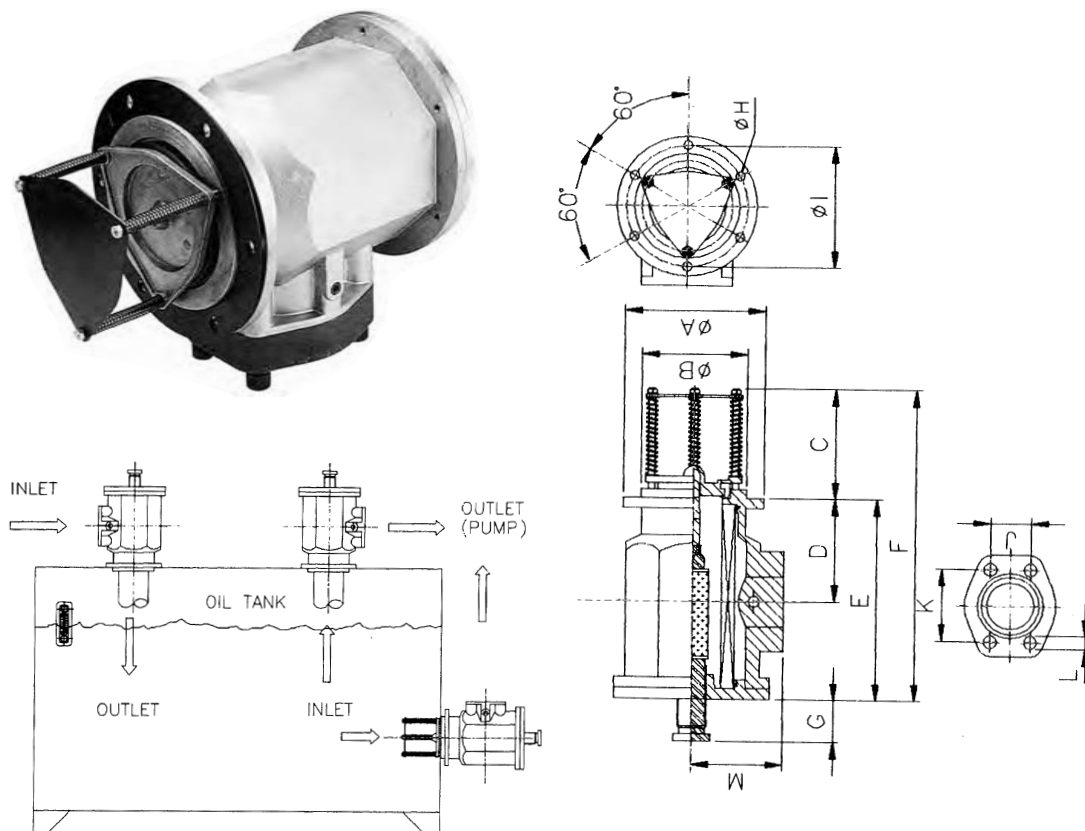


型式編號 Model	法蘭規格 Flange	流量 Flow ℓ/min	過濾精度 Filtration	A	B	C	D	E	F	G	H	I	J	K	L	M	六孔固定螺絲 BOLTS	重量 Weight kg	用別 USAGE
FSS-10	1 1/4"	250	Mesh 100	166	112	120	110	215	335	45	10	130	43	78	13	87	M8 × 25 × 6pcs	6.5	Suction 入油
FSS-12	1 1/2"	300		166	112	120	110	215	335	45	10	130	43	78	13	87	M8 × 25 × 6pcs	6.4	
FSS-1602	2"	320		166	112	120	110	215	335	45	10	130	43	78	13	87	M8 × 25 × 6pcs	6.3	
FSS-16	2"	400		220	150	120	120	235	355	45	13	180	62	106	18	112	M10 × 35 × 6pcs	10.6	
FSS-20	2 1/2"	550		220	150	120	120	235	355	45	13	180	62	106	18	112	M10 × 35 × 6pcs	10.2	
FSS-24	3"	700		220	150	120	120	235	355	45	13	180	62	106	18	112	M10 × 35 × 6pcs	9.6	
FSS-28	3 1/2"	760		242	180	120	120	262	382	45	15	210	78	130	18	125	M12 × 35 × 6pcs	13.8	
FSS-32	4"	820		242	180	120	120	262	382	45	15	210	78	130	18	125	M12 × 35 × 6pcs	13	
FSS-10B	1 1/4"	160	Micron 10u 25u	166	112	120	110	215	335	45	10	130	43	78	13	87	M8 × 25 × 6pcs	6.5	Return 迴油
FSS-12B	1 1/2"	210		166	112	120	110	215	335	45	10	130	43	78	13	87	M8 × 25 × 6pcs	6.4	
FSS-1602B	2"	250		166	112	120	110	215	335	45	10	130	43	78	13	87	M8 × 25 × 6pcs	6.3	
FSS-16B	2"	300		220	150	120	120	235	355	45	13	180	62	106	18	112	M10 × 35 × 6pcs	10.6	
FSS-20B	2 1/2"	400		220	150	120	120	235	355	45	13	180	62	106	18	112	M10 × 35 × 6pcs	10.2	
FSS-24B	3"	520		220	150	120	120	235	355	45	13	180	62	106	18	112	M10 × 35 × 6pcs	9.6	
FSS-28B	3 1/2"	570		242	180	120	120	262	382	45	15	210	78	130	18	125	M12 × 35 × 6pcs	13.8	
FSS-32B	4"	630		242	180	120	120	262	382	45	15	210	78	130	18	125	M12 × 35 × 6pcs	13	


F112-180

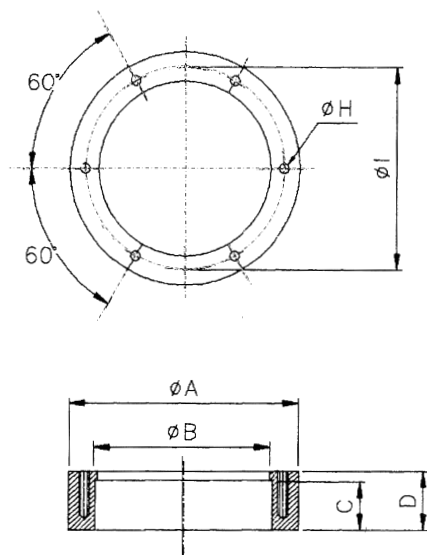


TT-12

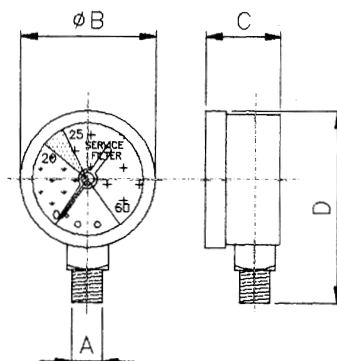


2"V-AD

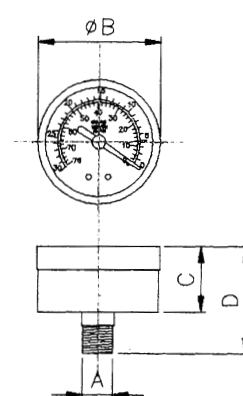

VDM

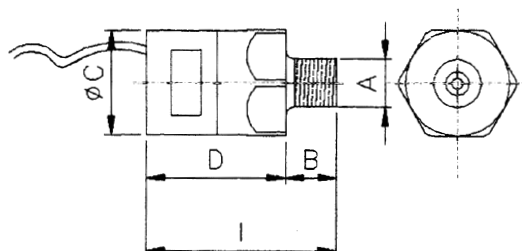


PDA

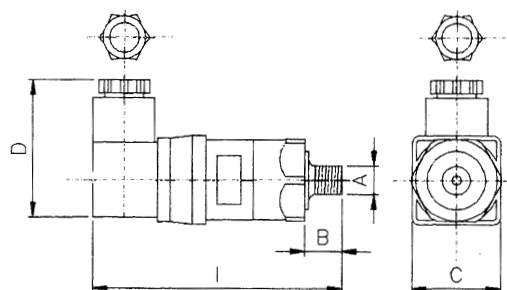


型式編號 Model	品名 Description	A m/m	B m/m	C m/m	D m/m	H Screw thd.	I Type of Fixing P.C.D	用別 USAGE	重量 Weight kg
F-112	固定六孔法蘭 Fixing Flange (six port)	150	112	15	20	M8	6Hole X Ø130	FSS10(B)- 1602(B)	1.1
F-150		210	150	22	28	M10	6Hole X Ø180	FSS16(B)- 24(B)	3.48
F-180		242	180	22	28	M12	6Hole X Ø210	FSS28(B)- 32(B)	4.22
2"V-AD	負壓計(真空計) Vacuum Gauge	1/4"PT	53	28	44	—	—	FSS10- 32 Sustion	0.1
VDM	負壓開關(真空開關) Vacuum Switch	1/4"PT	14	28	38	—	52	FSS10- 32 Sustion	0.08
TT-12	壓力計 Pressure Gauge	1/8"PT	42	23	60	—	—	FSS10B- 32B Return	0.06
PDA	壓力開關 Pressure Switch	1/8"PT	13	31	48	—	88	FSS10B- 32B Return	0.1


WIX-12AT

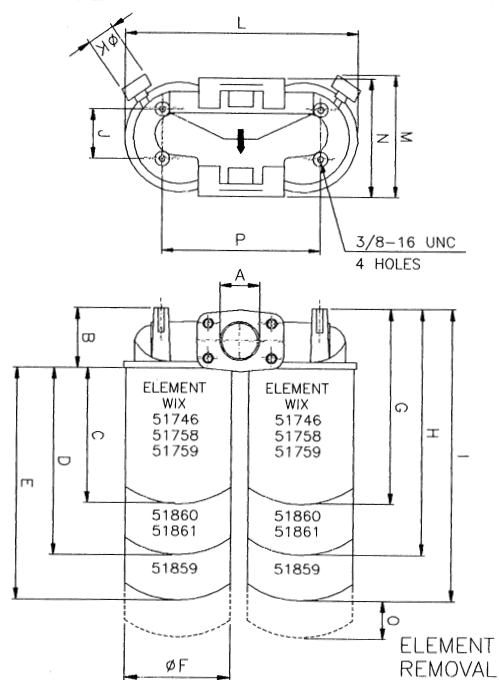


WIX-06(08)

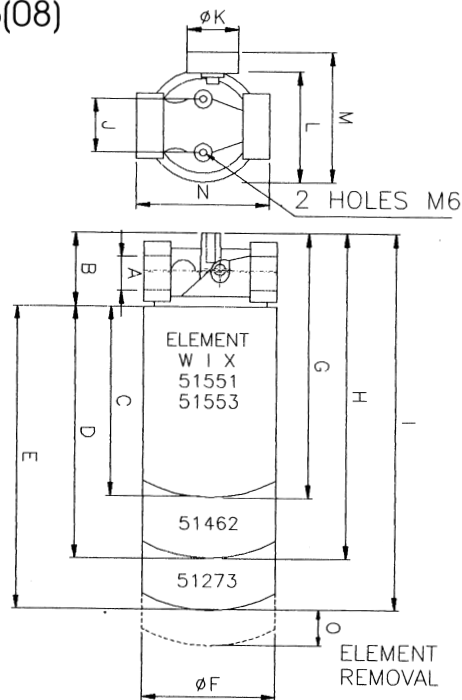

WIX-10

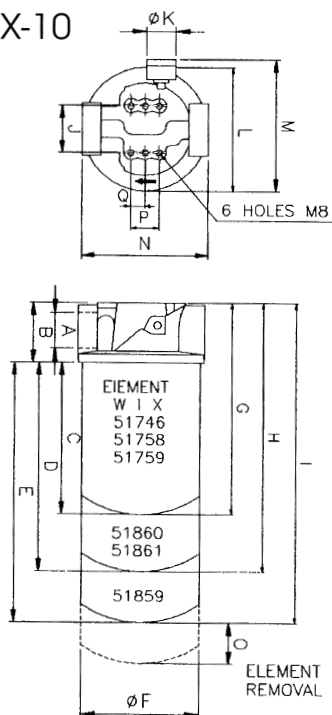

WIX-12

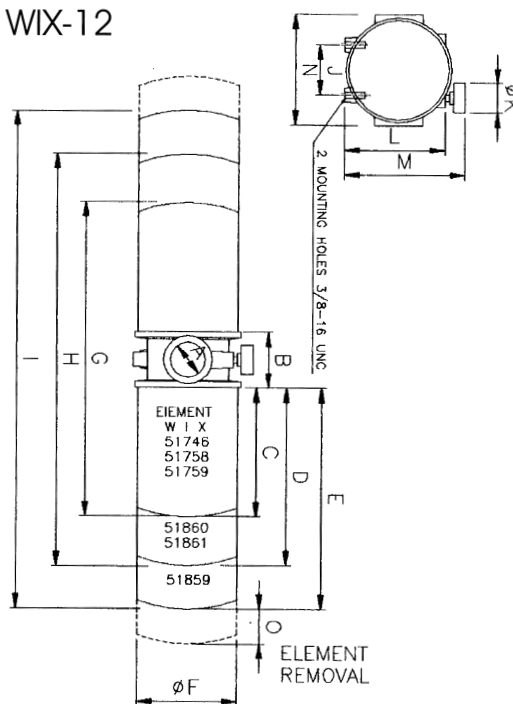



WIX-12



WIX-06F



WIX-06F

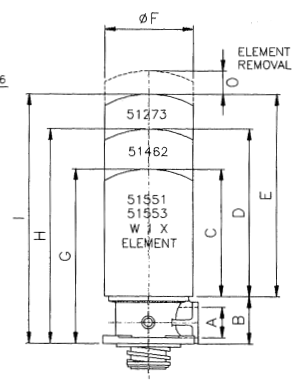

WIX-12AT



WIX-10




WIX-06




型式編號 Model	A 管徑 PT	B m/m	C m/m	D m/m	E m/m	F m/m	G m/m	H m/m	I m/m	J m/m	K m/m	L m/m	M m/m	N m/m	O m/m	P m/m	Q m/m
WIX-06	3/4"	53	135	178	215	93	188	231	268	38	38	80	105	93	25	-	-
WIX-08	1"	53	135	178	215	93	188	231	268	38	38	80	105	93	25	-	-
WIX-10	1 1/4"	65	167	230	286	127	232	295	351	47	38	136	150	136	45	37	18.5
WIX-06F	3/4"	49	135	178	215	93	184	227	264	71	38	92	135	89	-	95	-
WIX-08F	1"	49	135	178	215	93	184	227	264	71	38	92	135	89	-	95	-
WIX-12 FPC-12	1 1/2"	70	167	230	286	127	404	530	642	65	38	136	160	142	45	-	-
WIX-12AT FPC-12AT	1 1/2"	77	167	230	286	127	244	307	363	61	38	284	165	146	45	171	-

回油濾蕊 Spin-On Filter Element

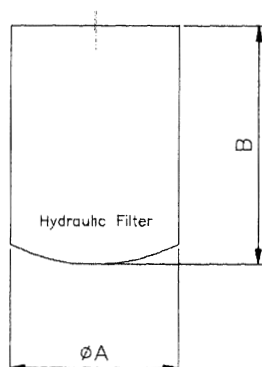


型式編號 Model	配合管徑 PT	φA m/m	B m/m	過濾精度 Filtration Micron	流量 Flow ℓ/min
wix-51551	06 08 3/4" 1"	93	135	10	60
wix-51553			135	33	70
wix-51462			178	25	90
wix-51273			210	10	120
wix-51746	10 12 1 1/4" 1 1/2"	127	174	5	130
wix-51758			174	25	160
wix-51759			174	10	144
wix-51860			230	10	172
wix-51861			230	25	185
wix-51859			286	5	200

滿油閥回油濾蕊 Surge Valves (Pre-Filling Valves)

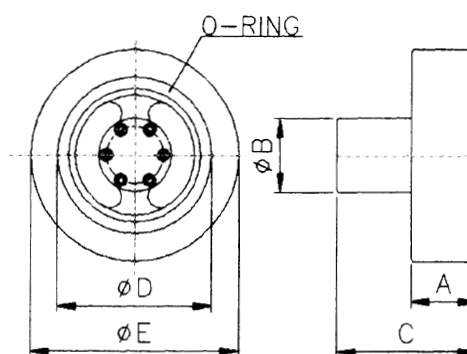


型式編號 Model	最高使用壓力 (kg/cm ²)	流量 Flow ℓ/min	A	φB	C	φD	φE	O-RING	螺絲×支 BOLTS
NOF-025	250	250	33	39	76	70	108	G65	M16×4
NOF-03		400	40	43	90	90	128	G85	M16×8
NOF-035		630	45	50	96	105.5	143	P95	M16×8
NOF-04		1000	58	56	120	130.5	168	P120	M20×8
NOF-05		1600	64	69	130	155	212	P145	M25×8
NOF-06		2500	72	88	180	200	248	P185	M30×8

FPF透明管式回油濾油器 Piping Type Return Filters (可清洗)

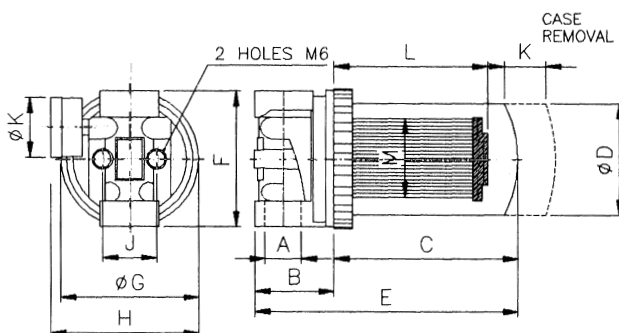

型式編號 Model	A 管徑 PT	B m/m	C m/m	D m/m	E m/m	F m/m	G m/m	H m/m	I m/m	J m/m	K m/m	ELEMENT		流量 Flow ℓ/min	過濾精度 Filtration	最高壓力 Max Pressure kgf/cm²	重量 Weigh kg
												L m/m	M m/m				
FPF-06	3/4"	65	153	93	218	114	116	127	42	44	25	122	70	70	Micron 10/1-25/1	10	1.34
FPF-08	1"	65	153	93	218	114	116	127	42	44	25	122	70	90			
FPF-06S	3/4"	65	153	93	218	114	116	127	42	44	25	122	70	90	Mesh 100-200		
FPF-08S	1"	65	153	93	218	114	116	127	42	44	25	122	70	110			

FRC箱上式回油過濾 Tank Type Return Filters (可清洗)

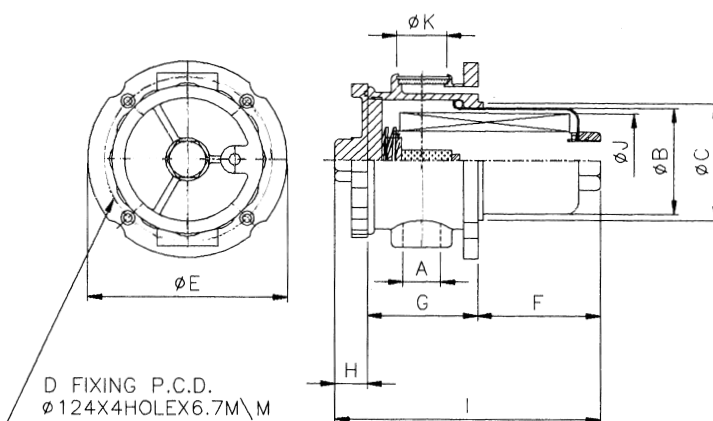

型式編號 Model	φA 口徑 PT	φB m/m	φC m/m	D m/m	φE m/m	F m/m	G m/m	H m/m	I m/m	J m/m	φK m/m	流量 Flow ℓ/min	過濾精度 Filtration	最高壓力 Max Pressure kgf/cm ²	重量 Weight kg
ERC-06	3/4"	80	88	124	147	90	82	24	196	70	36	70	Micron 10/μ-25μ	20	1.8
ERC-08	1"	80	88	124	147	90	82	24	196	70	36	90			
ERC-06S	3/4"	80	88	124	147	90	82	24	196	70	36	90	Mesh 100-200	20	1.8
ERC-08S	1"	80	88	124	147	90	82	24	196	70	36	110			

MFC摺深型濾油網
MFCS整支不銹鋼
摺深型濾油網
IDN旋壓式濾油網

Associated Products




Submerged Suction Filters 304 Stainless Submerged Suction Filters
Submerged Suction Filters

DAIWER


MFC摺深型濾油網 Submerged Suction Filters

MFCS整支不銹鋼摺深型濾油網 304 Stainless Submerged Suction Filters
100 Mesh

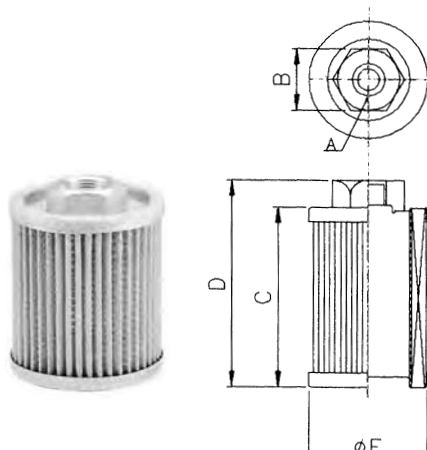

型式編號 Model	φA 口徑 PT	B m/m	C m/m	D m/m	E m/m	流量 Flow ℓ/min	過濾精度 Filtration Mesh	重量 Weight kg
MFC 02	1/4"	22	79	90	62	25	100	0.11
MFC 03	3/8"	22	79	90	62	30	100	0.11
MFC 03	3/8"	22	35	46	62	18	150	0.1
MFC 04	1/2"	28	104	115	62	50	100	0.15
MFC 04	1/2"	28	64	75	62	30	150	0.12
MFC 06	3/4"	34	163	175	62	90	100	0.18
MFC 06	3/4"	34	64	75	62	45	150	0.12
MFCS 08	1"	46	130	145	83	160	100	0.35
MFCS 10	1 1/4"	52	132	145	102	280	100	0.5
MFCS 12	1 1/2"	61	192	205	102	420	100	0.8
MFCS 16	2"	72	208	225	120	550	100	1.0
MFCS 16	2"	72	260	280	140	700	100	1.15
MFCS 20	2 1/2"	87	307	330	147	850	100	1.3
MFCS 24	3"	105	307	330	147	1000	100	1.45
MFC 24	3"	146	260	275	208	1100	100	3.15
MFC 32	4"	146	365	380	208	1300	100	3.0

IDN旋壓式濾油網 Submerged Suction Filters
150 Mesh

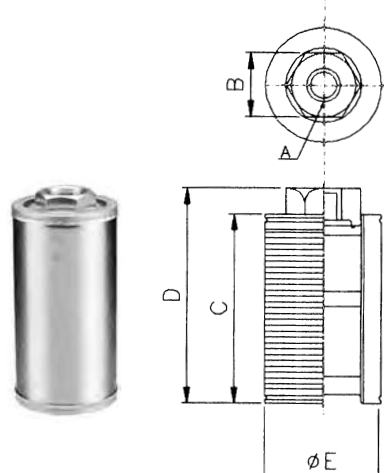


型式編號 Model	φA 口徑 PT	B m/m	C m/m	D m/m	E m/m	流量 Flow ℓ/min	過濾精度 Filtration Mesh	重量 Weight kg
✓ IDN-04	1/2"	28	156	167	61	35	150	0.24
✓ IDN-06	3/4"	34	156	171	61	46	150	0.26
✓ IDN-08	1"	46	142 193	158 208	82	90	150	0.39 0.45
✓ IDN-10	1 1/4"	52	213	227	102	150	150	0.73
✓ IDN-12	1 1/2"	61	232	246	120	205	150	0.97
✓ IDN-16	2"	72	314	331	120	320	150	1.24
✓ IDN-20	2 1/2"	87	417	439	146	550	150	2.50
✓ IDN-24	3"	105	417	439	146	600	150	2.55

Submerged Suction Filters 304 Stainless Submerged Suction Filters


DAIWER

IDW旋壓式濾油網 Submerged Suction Filters
IDWS旋壓式整支不銹鋼濾油網 304 Stainless Submerged Suction Filters
120 Mesh

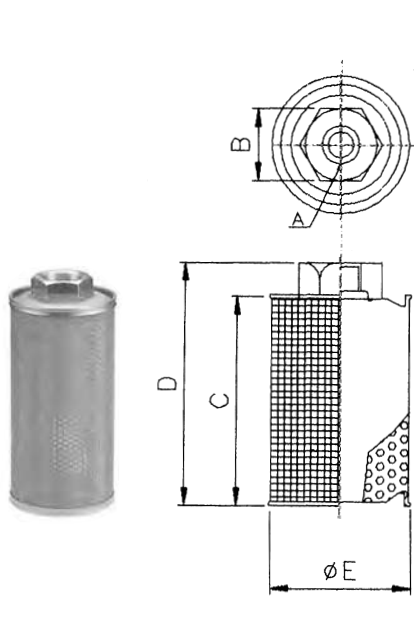


型式編號 Model	ΦA 口徑 PT	B m/m	C m/m	D m/m	E m/m	流量 Flow ℓ/min	過濾精度 Filtration Mesh	重量 Weight kg
IDW IDWS	02	1/4"	22	47	59	38	12	0.05
				97	109	38	14	0.07
				100	112	55	20	0.10
	03	3/8"	22	47	59	38	15	0.05
				97	109	38	17	0.07
				100	112	55	25	0.10
	04	1/2"	28	100	112	55	30	0.12
				144	160	65	33	0.18
	06	3/4"	34	144	160	65	50	0.19
	08	1"	46	188	207	84	100	0.33
IDW	10	1 1/4"	52	205	225	103	180	0.46
	12	1 1/2"	61	228	248	126	246	0.73
	16	2"	72	305	328	126	384	0.88
	20	2 1/2"	87	342	365	158	700	1.19
	24	3"	105	433	453	158	800	1.40
	24	3"	146	380	405	208	900	3.30
	32	4"	146	438	453	208	1000	3.09

MF旋壓式濾油網 Submerged Suction Filters
MFS旋壓式整支不銹鋼濾油網 304 Stainless Submerged Suction Filters
100 Mesh

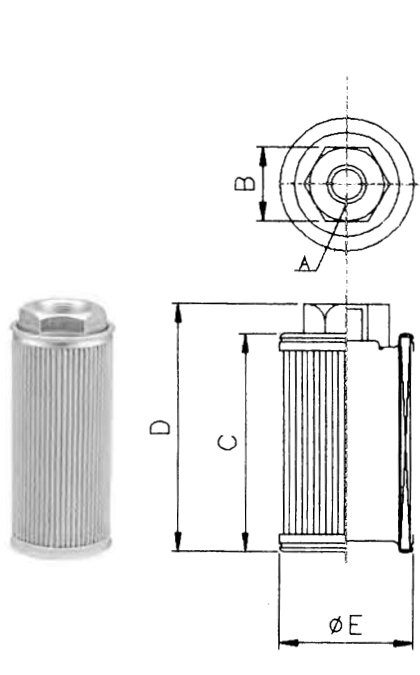


型式編號 Model	ΦA 口徑 PT	B m/m	C m/m	D m/m	E m/m	流量 Flow ℓ/min	過濾精度 Filtration Mesh	重量 Weight kg
MF MFS	02	1/4"	22	65	76	45	15	0.08
				50	61	56		0.09
	03	3/8"	22	65	76	45	17	0.08
				50	61	56		0.09
	04	1/2"	28	46	55	56	20	0.09
				90	98		33	0.12
	06	3/4"	34	127	139	56	55	0.14
	08	1"	46	153	169	56	110	0.19
				132	149	70		0.28
	10	1 1/4"	52	171	184	70	210	0.29
MF	12	1 1/2"	61	180	193	84	285	0.40
	16	2"	72	199	215	102	395	0.57
	20	2 1/2"	87	326	353	159	750	1.14
	24	3"	105	326	353	159	800	1.18
	24	3"	146	285	310	208	900	3.00
	32	4"	146	338	353	208	1000	2.95


HY-06

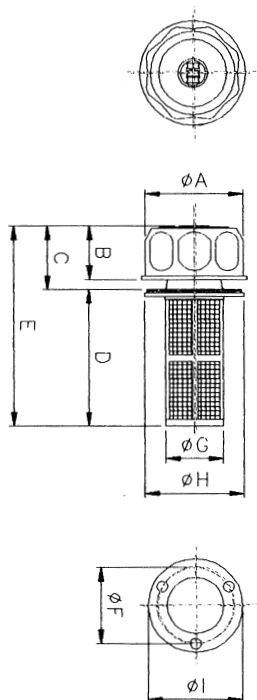


HY-12B

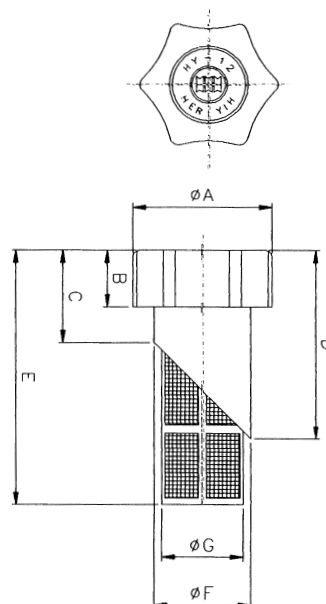


HY-10

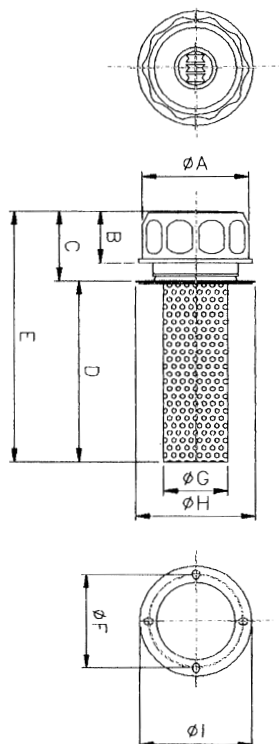

HY-12

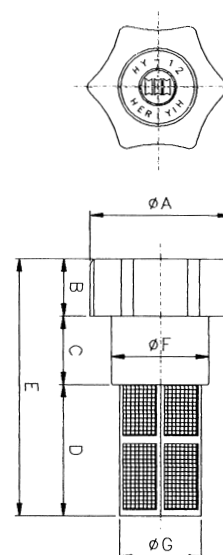


HY-24

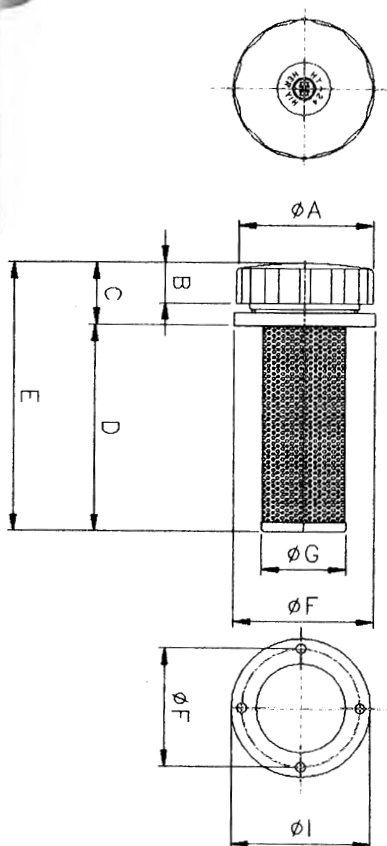

HY-08




HY-08S

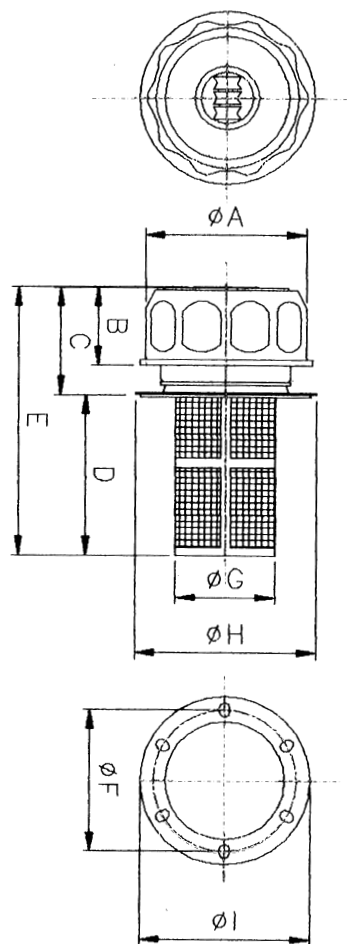


型式編號 Model	φA m/m	B m/m	C m/m	D m/m	E m/m	φF m/m	φG m/m	φH m/m	φI m/m	過濾精度 Filtration Micron		濾網材質 Material of Filter	流量 Flow Rate		固定方式 Type of Fixing F P.C.D	重量 Weight kg
										air	oil		air m ³ /min	oil l/min		
HY-06	53	29	34	74	108	42	31	51	51	40	400	SUS304	0.1	52	42φ 3Hole × 3/16(5m/m)	0.1
HY-08	80	39	52	83	135	71	49	89	85	40	400	Plastic PE	0.4	100	71φ 6Hole × 3/16(5m/m)	0.24
HY-08S	80	39	52	83	135	71	48	89	85	40	400	SUS304	0.4	100	71φ 6Hole × 3/16(5m/m)	0.24
HY-10	80	39	50	139	189	78	48	89	88	40	500	SECC	0.4	170	78φ 4Hole × 3/16(5m/m)	0.36
HY-12	85	35	42	80	157	60	48	-	-	40	400	SUS304	0.4	100	焊接 Welding	0.46
HY-12B(45°)	85	35	57	116	138	60	48	-	-	40	400	SUS304	0.4	100		0.55
HY-24	137	35	60	209	269	120	85	141	140	40	500	SECC	0.9	400	120φ 4Hole × 5/16(8m/m)	1.34

CV

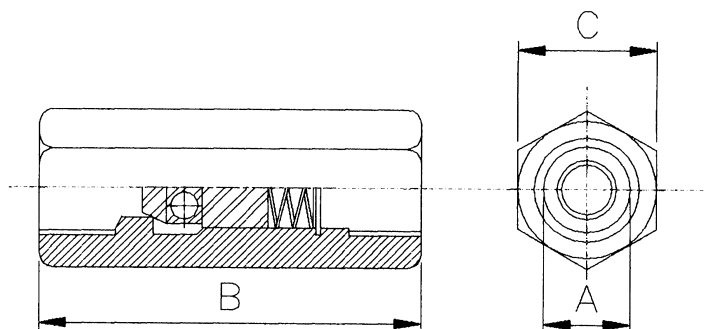

型式編號 Model	A 口徑 PT	B m/m	C m/m	流量 Flow ℓ/min	最高壓力 Max Operated Pressure kgf/cm ²	作動壓力 Cracking Pressure kgf/cm ²	重量 Weight kg
CV-03	3/8"	70	23	40	210	A ₁ :0.5 A ₂ :5	0.18
CV-04	1/2"	80	29	60			0.31
CV-06	3/4"	90	35	100			0.48
CV-08	1"	113	46	150			1.07
CV-10	1 1/4"	133	52	200			1.75
CV-12	1 1/2"	133	65	280			2.60
CV-16	2"	154	71	400			3.12


CK

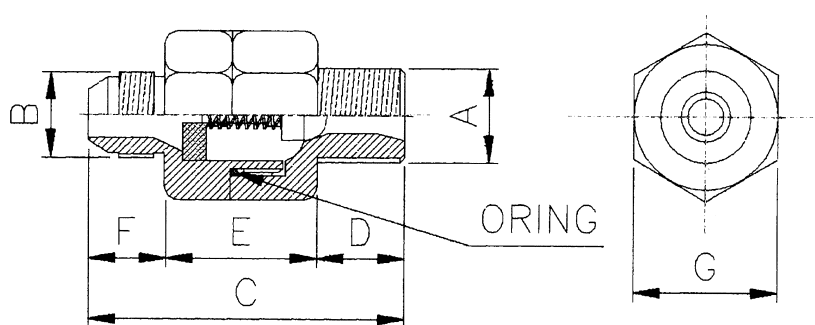

型式編號 Model	A 口徑 PT	B 口徑 PS	C m/m	D m/m	E m/m	F m/m	G m/m	流量 Flow ℓ/min	最高壓力 Max Operated Pressure kgf/cm ²	作動壓力 Cracking Pressure kgf/cm ²	重量 Weight kg
CK-03 03PT→03PS	3/8"	3/8"	70	15	40	15	26	40	210	A ₁ :0.5	0.18
CK-04 04PT→04PS	1/2"	1/2"	70	19	35	16	32	60		A ₂ :5	0.24


* CK係列有生產整支304 Stainless不銹鋼及銅材質之產品

CIT

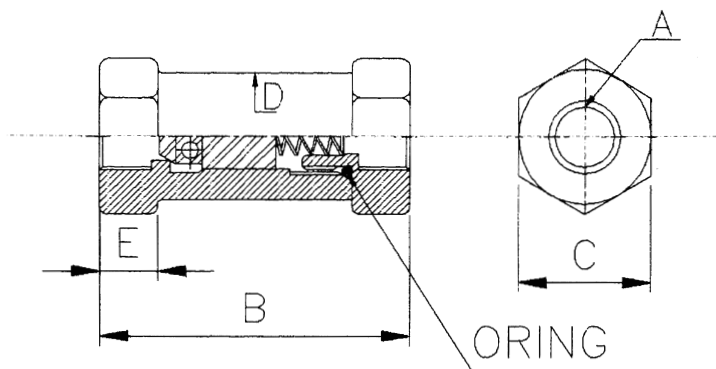

型式編號 Model	A 口徑 PT	B m/m	C m/m	D m/m	E m/m	流量 Flow ℓ/min	最高壓力 Max Operated Pressure kgf/cm ²	作動壓力 Cracking Pressure kgf/cm ²	重量 Weight kg
CIT-02	1/4"	75	29	27	14	30	350	A ₁ :0.5 A ₂ :5	0.3
CIT-03	3/8"	75	32	30	14	40			0.36
CIT-04	1/2"	104	35	34	25	60			0.62
CIT-06	3/4"	120	41	40	27	100			1.0
CIT-08	1"	139	57	56	32	150			2.20


CE

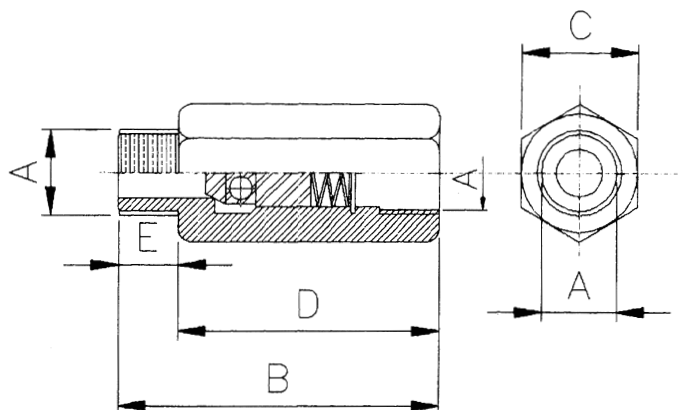

型式編號 Model	A 口徑 PT	B m/m	C m/m	D m/m	E m/m	流量 Flow ℓ/min	最高壓力 Max Operated Pressure kgf/cm ²	作動壓力 Cracking Pressure kgf/cm ²	重量 Weight kg
CE-03	3/8"	66	23	53	13	40	210	A ₁ :0.5	0.14
CE-04	1/2"	70	29	55	15	60		A ₂ :5	0.24

Sight Level and Temperature Gauges

DAIWER

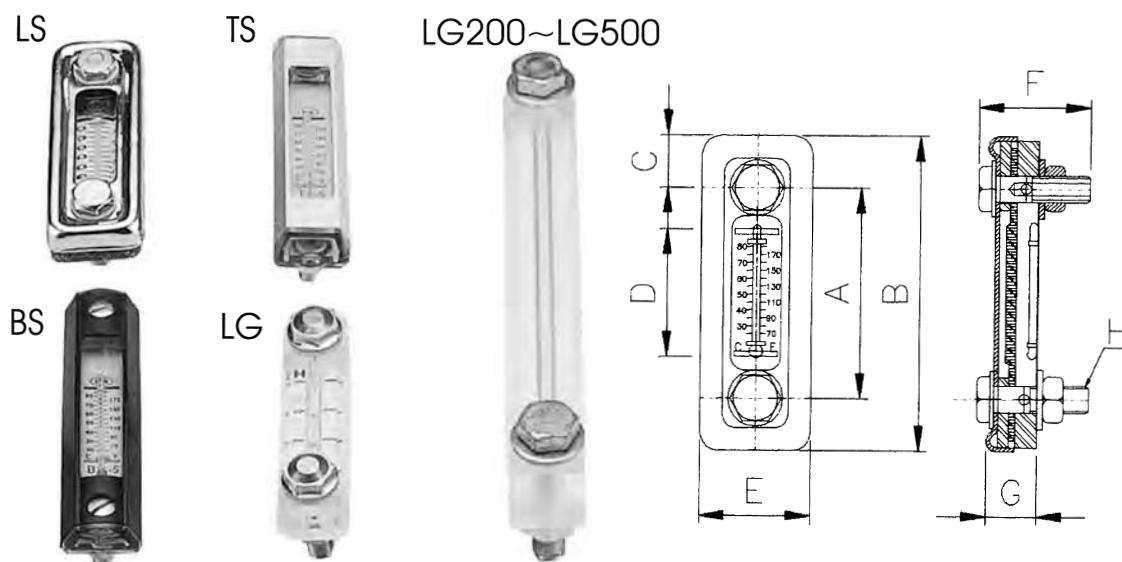


型式編號 Model	A m/m	B m/m	C m/m	D m/m	E m/m	F m/m	G m/m	H m/m	重量 Weight kg
LS-3"	79	118	20	58	42	41	18	M10×P1.5	0.19
LS-5"	127	182	28	95	51	45	20	M12×P1.75	0.33
BS-3"	76.2	104	14	40	36	38	20	M10×P1.5	0.10
BS-5"	127	155	14	92	36	38	20	M10×P1.5	0.14
TS-3"	76.2	101	13	42	36	38	19	M10×P1.5	0.09
TS-5"	127	151	13	91	36	38	19	M10×P1.5	0.12
LG-3"	75	106	15	55	25	46	13	M10×P1.5	0.12
LG-4"	100	130	15	80	25	46	13	M10×P1.5	0.13
LG-5"	127	156	15	107	25	46	13	M10×P1.5	0.14
LG-200	200	230	15	175	28	58	25	M12×P1.75	0.31
LG-300	300	330	15	275	28	58	25	M12×P1.75	0.39
LG-400	400	430	15	375	28	68	25	M12×P1.75	0.46
LG-500	500	530	15	475	28	68	25	M12×P1.75	0.55

LSG



LGG

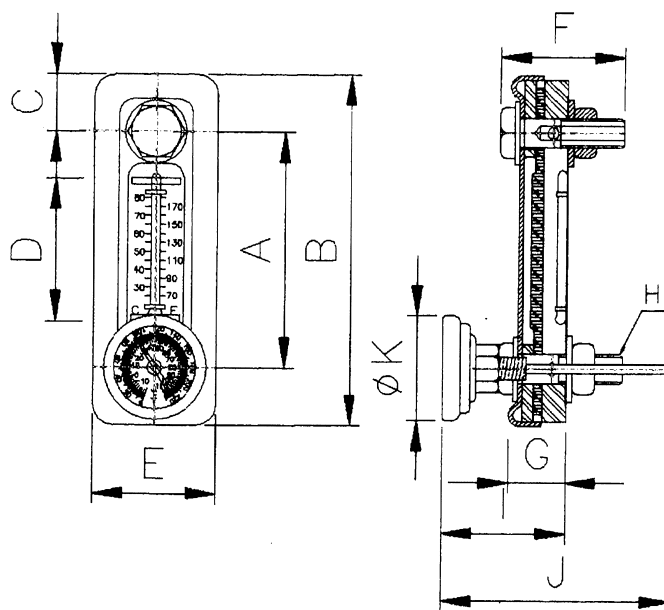


型式編號 Model	A m/m	B m/m	C m/m	D m/m	E m/m	F m/m	G m/m	H m/m	I m/m	J m/m	K m/m	重量 Weight kg
LSG-3"	79	118	20	58	42	41	18	M10×P1.5	45	77	35	0.21
LSG-5"	127	182	28	95	51	45	20	M12×P1.75	45	77	35	0.35
LGG-3"	75	106	15	55	25	46	13	M10×P1.5	44	77	35	0.14
LGG-4"	100	130	15	80	25	46	13	M10×P1.5	44	77	35	0.15
LGG-5"	127	156	15	107	25	46	13	M10×P1.5	44	77	35	0.16
LGG-200	200	230	15	175	28	58	25	M12×P1.75	55	82	35	0.33
LGG-300	300	330	15	275	28	58	25	M12×P1.75	55	82	35	0.41
LGG-400	400	430	15	375	28	68	25	M12×P1.75	55	82	35	0.48
LGG-500	500	530	15	475	28	68	25	M12×P1.75	55	82	35	0.57

Dust Seal For Pipe Standard Type Dust Seal For Pipe Single Plate Type


DAIWER

防塵套標準型 Dust Seal For Pipe Standard Type

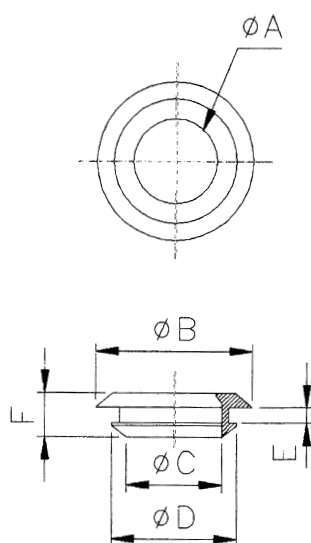

型式編號 Model	ϕA 管徑 inch	B m/m	C m/m	D m/m	E m/m	F m/m	用別 USAGE
RT-03	3/8"	26	15	17	7	18	銅管用 BRASS TUBE
RT-04	1/2"	32	18	20	7	18	
NT-03	3/8"	34	24	28	6	17	立布用 (鍍鋅管) ZINC PIPE
NT-04	1/2"	40	28	32	6	17	
NT-06	3/4"	50	34	38	6	17	
NT-08	1"	60	42	46	6	17	
NT-10	1 1/4"	70	50	54	6	17	
NT-12	1 1/2"	80	55	59	6	17	
NT-16	2"	96	69	72	17	28	
NT-20	2 1/2"	116	85	88	17	28	
NT-24	3"	130	99	102	17	28	
NT-32	4"	160	118	124	19	32	

防塵套單片型 Dust Seal For Pipe Single Plate Type

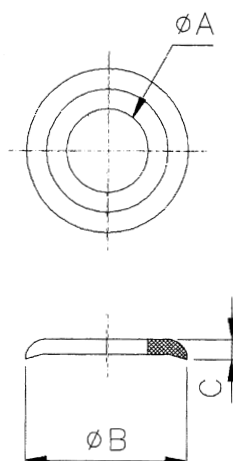


型式編號 Model	ϕA 管徑 inch	B m/m	C m/m	用別 USAGE
RE-02	1/4"	17	5	銅管用 BRASS TUBE
RE-03	3/8"	25	5	
NE-03	3/8"	41	6	立布用 (鍍鋅管) ZINC PIPE
NE-04	1/2"	45	7	
NE-06	3/4"	56	7	
NE-08	1"	64	7	
NE-10	1 1/4"	72	7	
NE-12	1 1/2"	82	7	
NE-16	2"	100	7	


Tank Flanges

DAIWER

NTT

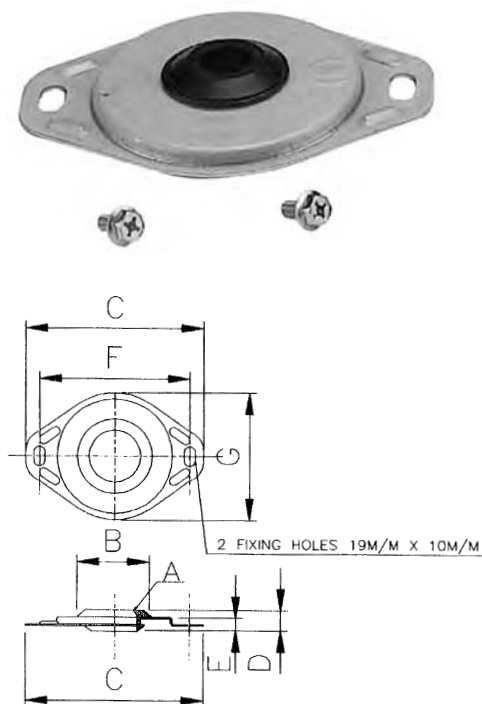

NTF

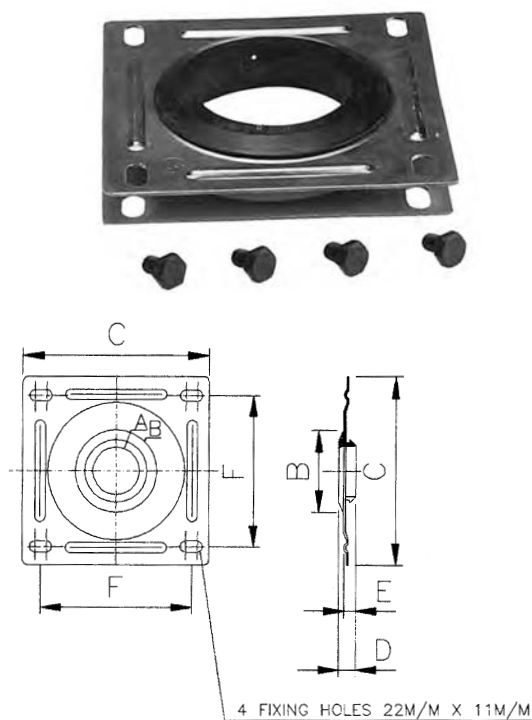


型式編號 Model	φA 管徑 Pipe Size inch	φB m/m	C m/m	D m/m	E m/m	F m/m	G m/m	φH 最大清潔孔徑 Max Tank Cut Out m/m	重量 Weight kg
NTT-03	3/8"	34	142	17	14	120	102	92	0.14
NTT-04	1/2"	40	142	17	14	120	102	92	0.14
NTT-06	3/4"	49	142	17	14	120	102	92	0.14
NTT-08	1"	60	142	17	14	120	102	92	0.14
NTT-10	1 1/4"	70	142	17	14	120	102	92	0.14
NTT-12	1 1/2"	80	142	17	14	120	102	92	0.14
NTF-08	1"	60	185	17	12	150	-	170	0.64
NTF-10	1 1/4"	70	185	17	12	150	-	170	0.62
NTF-12	1 1/2"	80	185	17	12	150	-	170	0.62
NTF-16	2"	96	185	28	12	150	-	170	0.6
NTF-20	2 1/2"	116	185	28	12	150	-	170	0.58
NTF-24	3"	130	185	28	12	150	-	170	0.56
NTF-32	4"	130	260	32	19	220	-	230	1.18

ST



NU

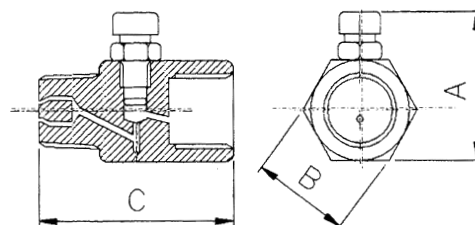


NST




GCT



180°

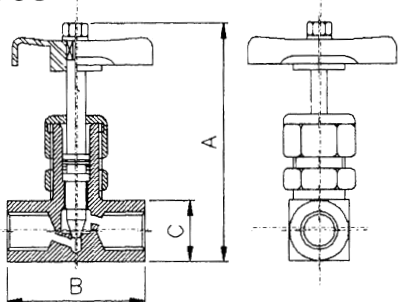


90°

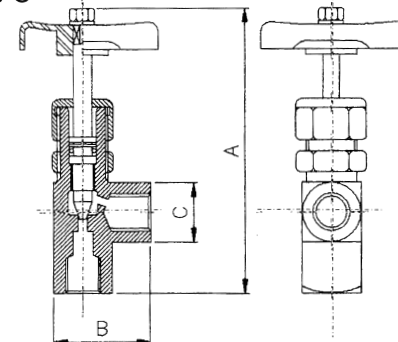

型式編號 Model	管徑 PT	流量 Flow ℓ/min	最高壓力 Max Pressure kgf/cm ²	重量 Weight kg	A Fully Open	B	C
ST02-180°	1/4"	2	210	0.3	97	49	25
ST03-180°	3/8"	21	210	0.3	97	49	25
ST04-180°	1/2"	30	210	0.64	125	64	32
ST02-90°	1/4"	2	210	0.34	111	42	24
ST03-90°	3/8"	21	210	0.34	111	42	24
NST02-180°	1/4"	2	250	0.28	97	51	22
NST03-180°	3/8"	21	250	0.28	97	51	22
NST02-90°	1/4"	2	250	0.32	122	37	22
NST03-90°	3/8"	21	250	0.32	122	37	22
GCT02-180°	1/4"	2	350	0.28	97	51	22
GCT03-180°	3/8"	21	350	0.28	97	51	22
GCT04-180°	1/2"	30	350	0.7	108	65	32
GCT06-180°	3/4"	100	350	1.10	128	80	38
GCT08-180°	1"	300	350	2.30	141	95	51
GCT02-90°	1/4"	2	350	0.32	122	37	22
GCT03-90°	3/8"	21	350	0.32	122	37	22
NU-02	1/4"	0.5	210	0.11	45	32	21
NU-03	3/8"	1	210	0.16	45	30	23
NU-04	1/2"	2	210	0.2	50	35	27

※NST係採用GCT本體ST針閥

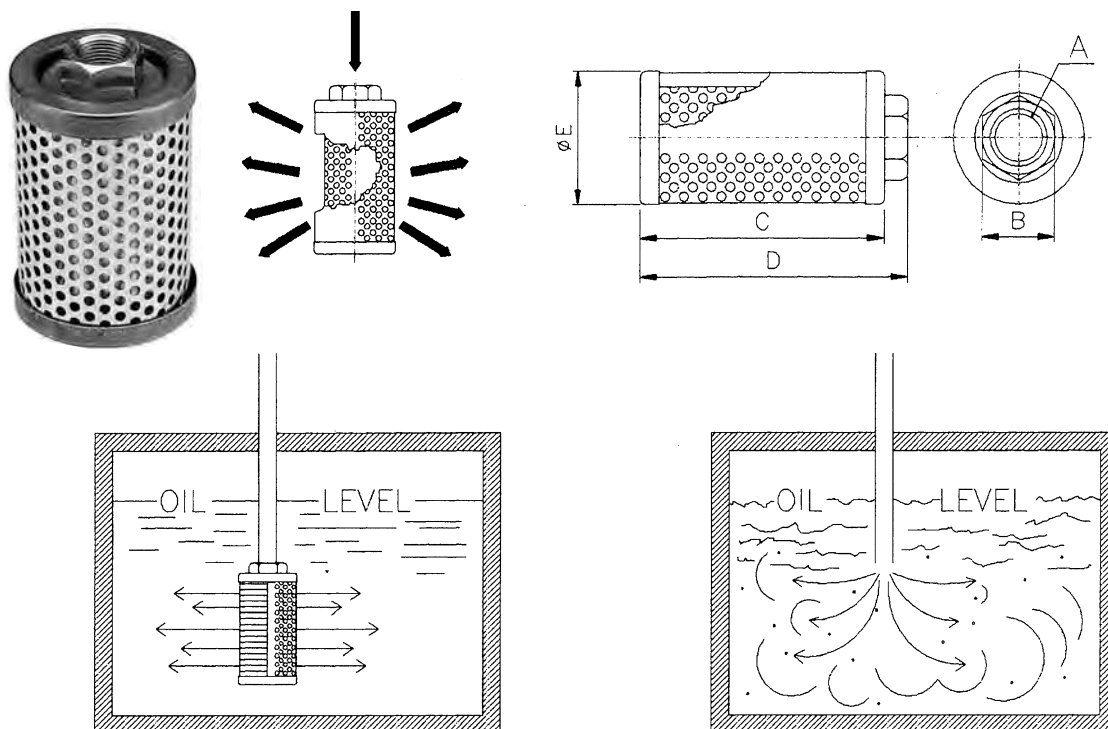


型式編號 Model	φA 口徑 PT	B m/m	C m/m	D m/m	E m/m	流量 Flow ℓ/min	重量 Weight kg
DC-06	3/4"	34	120	130	83	65	0.3
DC-08	1"	46	155	170	83	140	0.4
DC-10	1 1/4"	52	125	140	121	250	0.8
DC-12	1 1/2"	61	155	170	121	320	0.9
DC-16	2"	72	165	180	147	550	1.2
DC-20	2 1/2"	87	248	270	147	900	1.5
DC-24	3"	105	298	320	147	1100	1.9
DC-32	4"	146	316	330	208	1500	3.2

NM-Super Flexible Coupling Pressure Switch


DAIWER

聯軸器 NM-Super Flexible Coupling

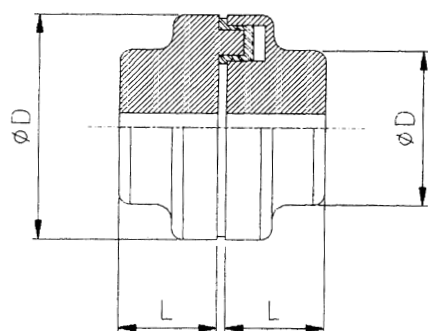

Coupling NM Type	Torque		Max. speed rpm.	Bore diameter		Boss diam (D)	Outside diam (OD)	Distance through boss (L)	Space & perm. tolerance	Approx Weight kgs.
	Normal Kg-m	Max. Kg-m		Min.	Max.					
50	1.3	2.3	13,500	7	19	33	50	25	2.0 ± 0.5	0.48
67	2.2	4	10,000	9	28	46	67	30	2.5 ± 0.5	1.02
82	5.0	9	8,000	10	32	53	82	40	3.0 ± 1.0	1.88
97	10.5	19	7,000	12	42	69	97	50	3.0 ± 1.0	3.54
112	16.7	30	6,000	14	48	79	112	60	3.5 ± 1.0	5.40
128	26.7	48	5,000	18	55	90	128	70	3.5 ± 1.0	8.10
148	41.7	75	4,500	22	65	107	148	80	3.5 ± 1.0	13.50
168	69.5	125	4,000	28	75	126	170	90	3.5 ± 1.0	19.30
194	112.0	200	3,500	32	85	140	194	100	3.5 ± 1.0	26.30
214	167.0	300	3,000	45	95	157	214	110	4.0 ± 2.0	35.70
240	267.0	480	2,750	60	110	179	240	120	4.0 ± 2.0	46.70
265	417.0	750	2,500	70	120	198	265	140	5.5 ± 2.0	66.30

壓力開關 Pressure Switch

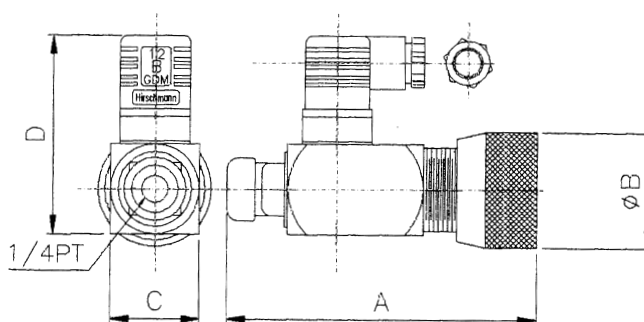


型式編號 Model	壓力範圍 Pressure Range	A m/m	B m/m	C m/m	D m/m
HK-02	0 ~ 70kg	130	48	38	85
HK-02A	70 ~ 210kg				
TY-02	0 ~ 240kg	140	36	38	72

HT-Roller Chain Flexible Coupling Oil Cooler


DAIWER

鏈條式齒輪聯軸器 HT-Roller Chain Flexible Coupling

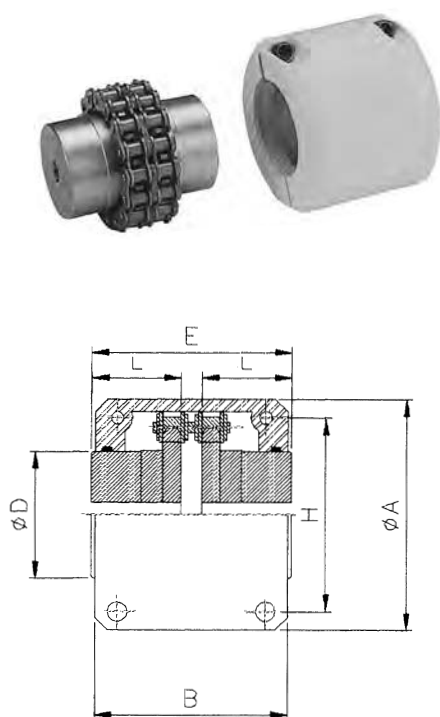

Coupling No.	Bore Diameter		E m/m	L m/m	D m/m	H m/m	Weight Kgs	Casing No.	A	B	Weight Kgs
	Min.	Max.									
HT4012	11	22	80	36	35	61	0.8	HT4012	75	75	0.3
HT4016	15	30	80	36	50	77	1.4	HT4016	92	75	0.4
HT5016	15	40	100	45	60	96	2.6	HT5016	111	85	0.6
HT5018	19	45	100	45	70	106	3.5	HT5018	122	85	0.7
HT6018	22	55	120	54	85	128	6.2	HT6018	142	106	1.0
HT6022	25	75	120	54	110	152	9.8	HT6022	167	106	1.2
HT8018	30	78	150	67	115	170	13.9	HT8018	186	130	2.3
HT8022	35	95	150	67	140	202	20.2	HT8022	220	130	2.4
HT10020	35	110	201	91	160	228	34	HT10020	248	152	3.2
HT12018	48	120	261	119	170	252	51	HT12018	305	180	5.6
HT12022	58	150	261	119	210	300	66	HT12022	355	180	7.1

油壓冷卻器(多管式) Oil Cooler

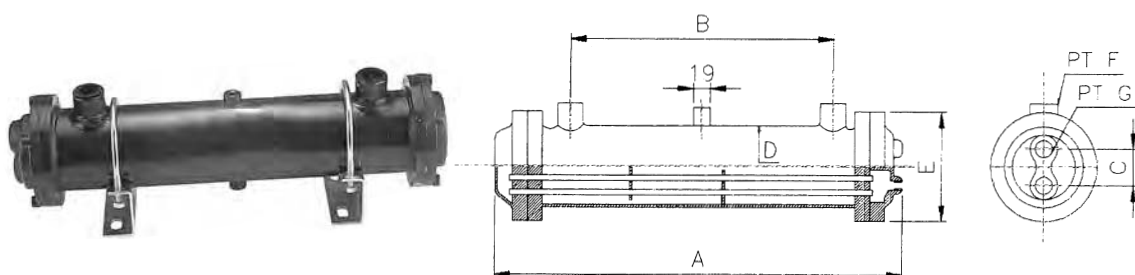

型式編號 Model	A m/m	B m/m	C m/m	φD m/m	φE m/m	F m/m	G m/m	散熱管 BRASS TUBE	流量 FLOW ℓ/min	重量 Weight Kgs
OR-60L	460	295	40	89.1	120	3/4	3/4	22	60	8
OR-100L	542	370	40	114.3	120	3/4	3/4	26	100	10
OR-150L	573	375	75	139.8	170	1 1/4	3/4	42	150	15
OR-250L	800	600	75	139.8	170	1 1/4	3/4	58	250	22
OR-350L	1198	1000	75	139.8	170	1 1/4	3/4	58	350	30
OR-600L	1215	970	86	165.2	196	2	1 1/2	58	600	40
OR-800L	1715	1470	86	165.2	196	2	1 1/2	58	800	50
OR-1000L	2135	1890	86	165.2	196	2	1 1/2	58	1000	70

單(雙)向控制節流閥
甘油式壓力計


Associated Products



Throttle Valve (Needle Valve)
PD Low Cost Silicone Filled Gauges

DAIWER

單(雙)向控制節流閥 Throttle Valve (Needle Valve)

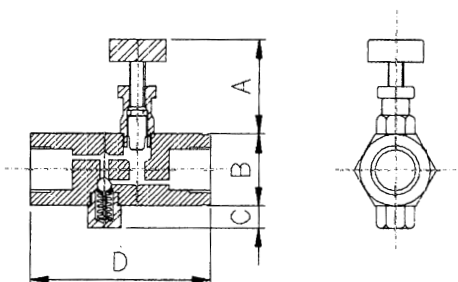

型式編號 Model	口徑 PT	流量 Flow l/min	最高壓力 Max Pressure Kgf/cm ²	A m/m	B m/m	C m/m	D m/m	材質
KC-02	1/4"	12	350	24	23	10	62	六角鐵
KC-03	3/8"	20	350	26	26	10	70	六角鐵
KC-04	1/2"	30	350	30	32	13	81	六角鐵
KC-06	3/4"	48	350	40	41	14	91	六角鐵
TL-02	1/4"	12	210	32	23	7	62	六角鐵
TL-03	3/8"	20	210	32	26	7	70	六角鐵
TL-04	1/2"	30	210	35	33	10	81	六角鐵
TL-06	3/4"	48	210	39	41	13	92	六角鐵
TC-03	3/8"	20	70	46	25	24	64	四角青銅

甘油式壓力計 PD Low Cost Silicone Filled Gauges




型式編號 Model	壓力範圍 Kg/cm ² pressure range	面 徑 Dial size	管 牙 PT	耐 溫 °C
直立式充油錶 LA	0-1kg	2 1/2" (60m/m)	1/4"	90°C
	2-400kg			
	500-700kg			
	0-1000kg			
直立式充油錶 4LA	0-1kg	4" (100m/m)	3/8"	90°C
	2-400kg			
	500-700kg			
	0-1000kg			
埋入式充油錶 2LBD	0-1kg	2 1/2" (60m/m)	1/4"	90°C
	2-400kg			
	500-700kg			
	0-1000kg			
埋入式充油錶 4LBD	0-1kg	4" (100m/m)	3/8"	90°C
	2-400kg			
	500-700kg			
	0-1000kg			

Pipe Clamp The Ultimate Cooling Hose

DAIWER

管路固定夾 Pipe Clamp

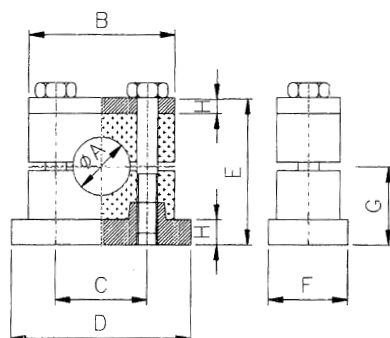

型式編號 Model	管徑 Inch	ΦA m/m	B m/m	C m/m	D m/m	E m/m	F m/m	G m/m	H m/m
HTH-01	1/8"	6-18	55	73	33	48	30	24	8
HTH-02	1/4"								
HTH-03	3/8"								
HTH-04	1/2"	20-30	70	85	45	64	30	32	8
HTH-06	3/4"								
HTH-08	1"								
HTH-10	1 1/4"	30-42	85	100	60	76	30	38	8
HTH-12	1 1/2"								
HTH-16	2"								
HTH-20	2 1/2"	38-70	115	150	90	110	45	55	10
HTH-24	3"								
HTH-28	3 1/2"								
HTH-32	4"	65-90	152	180	122	140	60	70	10
HTH-40	5"								
HTH-48	6"								
HTH-40	5"	90-135	205	225	168	200	80	100	15
HTH-48	6"								
HTH-40	5"	136-168	252	270	205	230	90	115	15
HTH-48	6"								

冷卻水管 The Ultimate Cooling Hose



型式編號 Model	規格 PT	噴水孔 m/m	標準長度 m/m
CH-02	1/4"管體1/4"牙	1.5 3 6	300
CH-02(01)	1/4"管體1/8"牙	1.5 3 6	300
CH02(01)	1/4"管體1/8"牙1/4"牙	扁咀 1×22	300
CH-03	3/8"管體3/8"牙	6 9 12	300
CH-03(04)	3/8"管體1/2"牙	6 9 12	300
CH-03(04)	3/8"管體3/8"牙1/2"牙	扁咀 2×30 扁咀 2×60	300
CH-04	1/2"管體1/2"牙	9 12	300
CH-04(03)	1/2"管體3/8"牙	9 12	300
CH-04(03)	1/2"管體1/2"牙3/8"牙	扁咀 4×30 扁咀 4×60	300

噴油座 Magnetic base and Hose



型式編號 Model	支 數	規 格 PT	噴 水 孔 m/m
M-01	1	1/4"管體1/8"牙1/4"牙	1.5 3 6
M-02	2		
M-03	3	1/4"管體1/8"牙1/4"牙 水管附考克	1.5 3 6
M-01A	1		
M-02A	2		
M-03A	3		

噴油管 Coolant Tubes



型式編號 Model	長 度 Inch	噴 油 孔 m/m	管 牙 PT	管 徑 m/m
SP02-10-13	13"	4	1/4"	10.5管體
SP02-10-16	16"			
SP02-14-12	12"	5	1/4"	14.5管體
SP02-14-14	14"			
SP02-14-24	24"			
SP02-14-30	30"			
SP03-10-13	13"	4	3/8"	10.5管體
SP03-10-16	16"			
SP03-14-12	12"	5	3/8"	14.5管體
SP03-14-14	14"			
SP03-14-16	16"			
SP03-14-18	18"			
SP03-14-20	20"			
SP03-14-22	22"			
SP03-14-24	24"			
SP03-14-30	30"	5	1/2"	14.5管體
SP04-14-26	26"			
SP04-14-30	30"			