

液壓馬達

General Purpose
Hydraulic Motors

液壓馬達

高扭力 低轉速

高品質 低價位




廣泛適用於射出成型機、掃街機、漁撈機械、輸送帶

JH 系列

MODEL	CC/REV	RPM	LPM	KG-M	BAR	KG
JH-050	50	946	45/57	6.1/8.7	105/150	5
JH-060	63	752	45/57	6.9/10.0	95/138	5.3
JH-080	80	596	45/57	8.8/12.8	95/138	5.5
JH-100	100	458	45/57	11.0/16.0	95/138	5.7
JH-160	160	278	45/57	17.0/25.5	86/129	6
JH-200	200	240	45/57	19.3/30.0	78/121	6.3

裝置尺寸

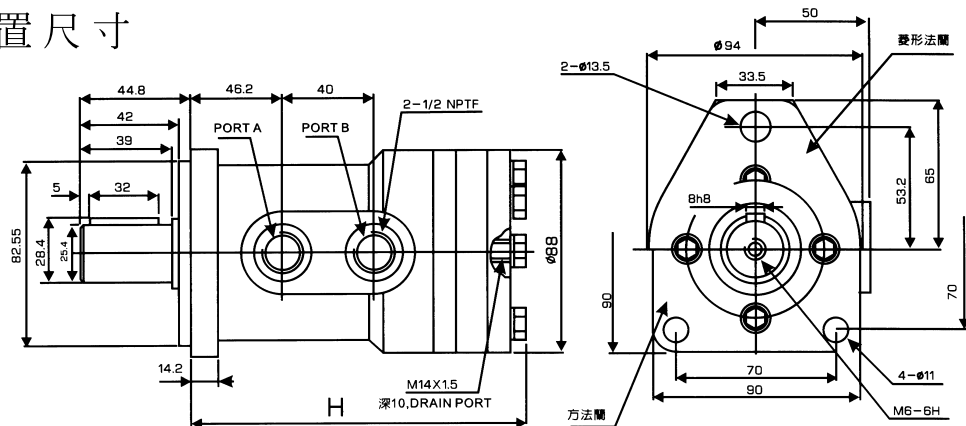

尺寸H:

排量	50	63	80	100	160	200
H mm	146.2	148.2	147.2	149.2	157.2	162.8

性能參數

50 cc/r		工作壓差 Bar							
		28	41	55	69	83	97	110	124
流量	7.6	18	28	38	45	54	62		
		125	110	96	86	76	65		
LPM	15.1	18	27	37	44	53	62	70	78
		260	250	238	231	215	206	196	188
LPM	22.7	16	24	32	40	49	58	65	71
		414	406	395	385	375	368	356	345
LPM	30.3	13	21	30	37	46	55	62	68
		550	540	528	515	502	485	480	472

扭距 Nm
轉速 RPM

80 cc/r		工作壓差 Bar							
		28	41	55	69	83	97	110	124
流量	7.6	28	42	57	72	88	104	114	128
		92	90	86	82	78	74	72	68
LPM	15.1	27	40	55	71	85	100	112	125
		184	182	178	175	172	168	165	160
LPM	22.7	22	35	50	64	80	95	108	121
		280	276	272	265	261	258	255	250
LPM	30.3	18	30	45	60	76	90	103	117
		376	372	369	366	360	355	350	345
LPM	37.9			40	55	70	83	98	110
				466	464	459	456	452	444

160 cc/r		工作壓差 Bar							
		28	41	55	69	83	97	110	124
流量	7.6	45	76						
		35	33						
LPM	15.1	54	83	115	144	176	202	218	
		85	82	78	72	68	60	53	
LPM	22.7	51	80	110	140	172	200	215	236
		133	129	120	114	104	92	86	68
LPM	30.3	49	77	106	138	168	198	215	240
		180	175	165	158	152	142	128	108
LPM	37.9	46	75	102	135	162	192	212	234
		226	220	212	202	195	180	168	155
LPM	45.4	43	70	100	130	156	185	210	220
		275	270	260	254	246	240	228	216
LPM	53.0		62	95	122	150	178	200	212
			322	320	310	302	298	285	265

63 cc/r		工作壓差 Bar							
		28	41	55	69	83	97	110	124
流量	7.6	23	35	46	58	68	78		
		100	90	78	68	62	56		
LPM	15.1	23	35	46	58	68	78	88	96
		210	198	188	182	168	158	152	145
LPM	22.7	20	32	43	55	65	76	86	95
		330	320	312	305	298	288	278	270
LPM	30.3	17	28	38	50	62	72	80	90
		445	434	425	414	398	386	378	365

100 cc/r		工作壓差 Bar							
		28	41	55	69	83	97	110	124
流量	7.6	32	50	69	87	106	124		
		73	69	64	58	49	41		
LPM	15.1	31	48	67	85	102	120	135	148
		148	140	135	130	124	112	104	90
LPM	22.7		46	65	83	100	118	132	145
			218	210	203	198	186	173	160
LPM	30.3		44	63	80	99	117	130	143
			295	290	275	268	255	243	228
LPM	37.9		42	60	76	94	110	123	136
			370	360	350	340	330	315	298
LPM	45.4			58	75	90	105	118	132
				440	430	415	405	395	385

200 cc/r		工作壓差 Bar							
		28	41	55	69	83	97	110	
流量	7.6								
LPM	15.1	65	96	140	175	210	235		
		70	66	60	53	46	42		
LPM	22.7	64	95	137	176	213	247	265	
		109	103	96	91	85	74	68	
LPM	30.3	60	92	135	174	210	248	268	
		147	144	138	130	125	118	110	
LPM	37.9	54	88	129	172	208	245	265	
		185	182	175	166	160	154	144	
LPM	45.4	46	79	123	160	198	232	250	
		222	218	210	200	194	186	180	
LPM	53.0		66	105	142	180	216	230	
			255	252	242	234	226	218	

□連續工作區 / 選用馬達應使連續工作點在連續工作區

■間斷工作區 / 馬達全負荷工作前應有磨合期，推荐在額定壓力的30%下磨合一小時