
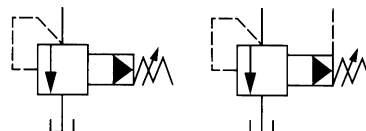


Low Noise Type Pilot Operated Relief Valve

DAIWER

Low Noise Type Pilot Operated Relief Valve

JIS Graphical Symbol

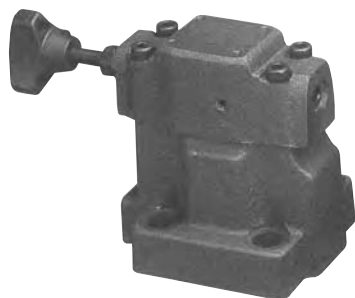

Model Number Designation

SB G-06-R

DIRECTION OF KNOB
R : RIGHT (P PORT SIDE)
L : LEFT (T PORT SIDE)

VALVE SIZE
03 : 3/8"
06 : 3/4"
10 : 1-1/4"

G : SUB-PLATE MOUNTING

LOW NOISE TYPE PILOT OPERATED RELIEF VALVES

Ratings

MODEL	MAX. PRESSURE kgf/cm ²	PRESSURE ADJ. RANGE kgf/cm ²	MAX. FLOW LPM	WEIGHT kg
SBG-03-※-※	250	5-250	100	4.8
SBG-06-※-※			200	5.9
SBG-10-※-※			400	11.3


Mounting Bolt (Attachment)

MODEL NO.	SOC HOL CAP SCREW
SBG-03	M12x40L.....2PCS
SBG-06	M16x45L.....2PCS
SBG-10	M20x60L.....2PCS


Low Noise Type Pilot Operated Relief Valve

DAIWER

■ SBG-03.06.10R

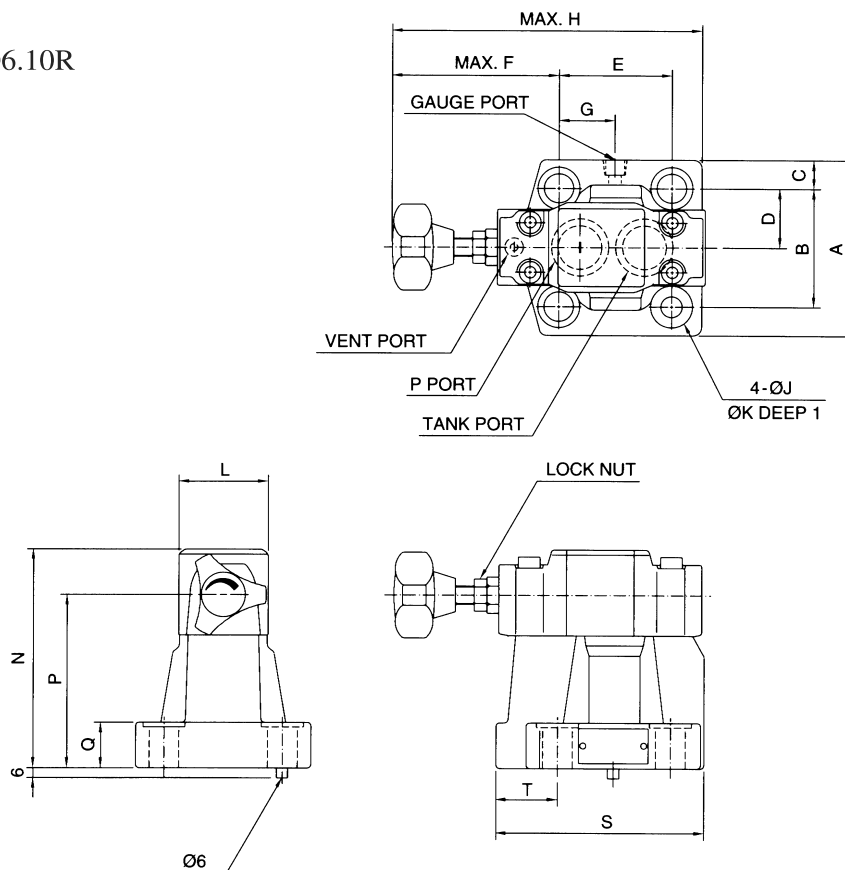

■ SBG-03.06.10L



MODEL	A	B	C	D	E	F	G	H	J
SBG-03	76	53.8	11.1	26.9	53.8	113.5	27	171	13.5
SBG-06	104	70	17	35	66.7	98.8	33.7	171	17.5
SBG-10	120	82.6	18.7	41.3	88.9	58.6	44.9	188	21.5

MODEL	K	L	N	P	Q	S
SBG-03	21	51	132	104	22	106
SBG-06	25	51	132	104	27	123
SBG-10	32	65	167	135	33.5	155