

Solenoid Operated Relief Valve

DAIWER

■ Solenoid Operated Relief Valve




BST-03



BSG-03

■ JIS Graphical Symbol

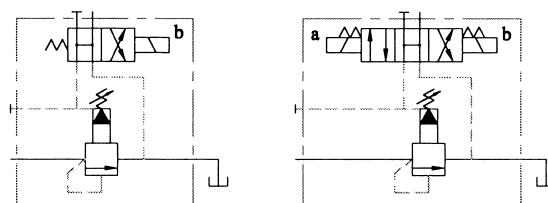

■ Model Number Designation

BSG - 03

Series Number

Type of Connection

T: Threaded connection

G: Sub-Plate Mounting

Valve Size

■ Mounting Bolt (Attachment)

Valve Model No.	Socket Head Cap Screw	Qty.
BSG-03	M12X70 Lg, M12X95 Lg	2
BSG-06	M16X60 Lg, M16X80 Lg	2
BSG-10	M20X70 Lg, M20X90 Lg	2


■ Ratings

Valve Model No.	Max. Pressure	Pressure Adjustment Range	Max.Flow l/min	Piping Size Rc	Mass kg
BST-03	250 kgf/cm ²	5-250 kgf/cm ²	90	3/8"	7.4
BSG-03			90	3/8"	7.1
BST-06			125	3/4"	7.4
BSG-06			125	3/4"	8.0
BST-10			250	1 1/4"	11.1
BSG-10			250	1 1/4"	11.3

Solenoid Operated Relief Valve

DAIWER

■ BST-03, 06, 10


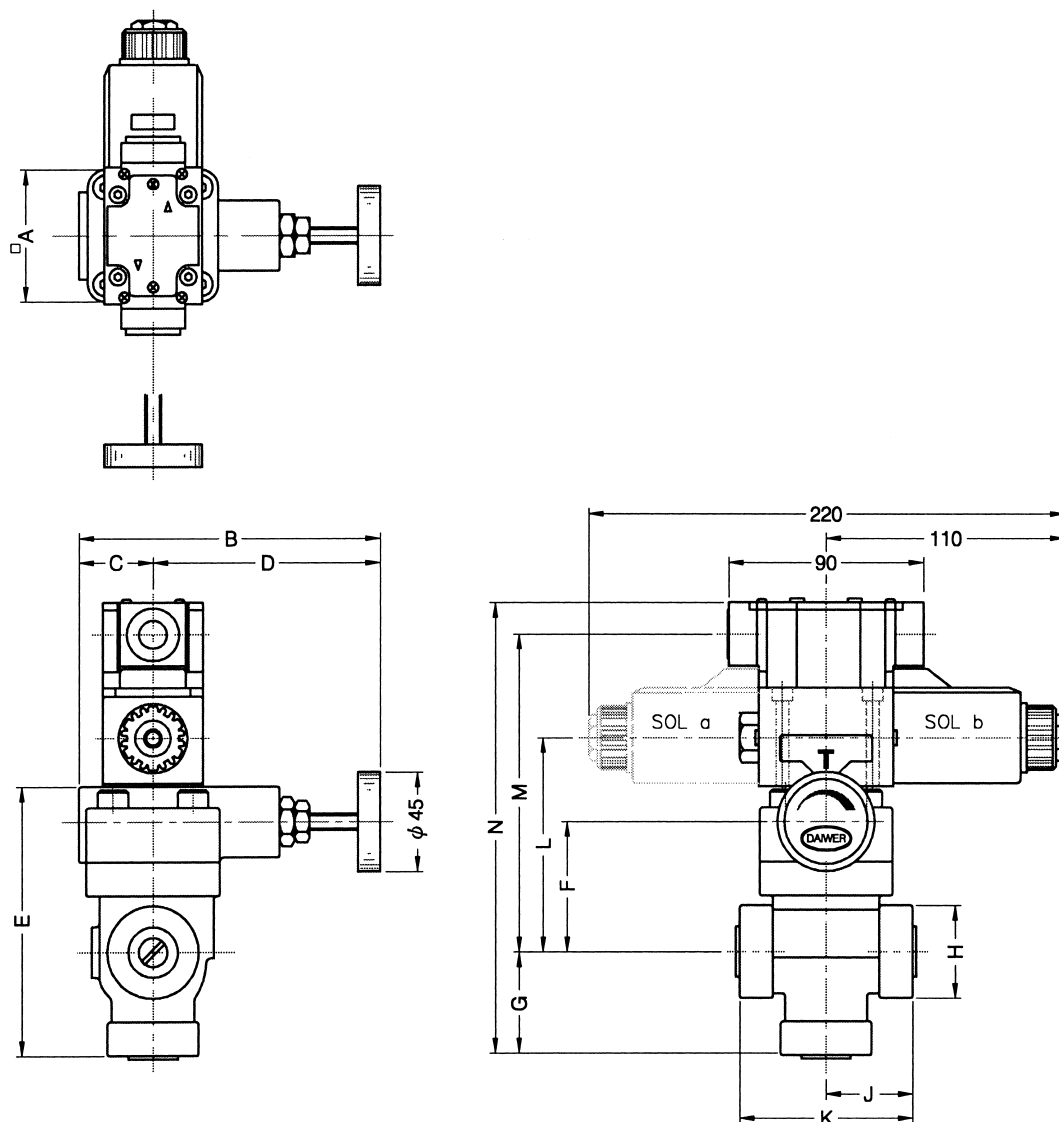


Model	A	B	C	D	E	F	G	H	J	K	L	M	N
BST-03	60	139	34	105	122	59	47	$\phi 42$	40	80	81	144.5	206
BST-06	75	143	36	107	131	69	45	$\phi 51$	51	102	91	155.5	215
BST-10	75	143	36	107	131	69	45	$\phi 51$	51	102	91	155.5	215

Solenoid Operated Relief Valve

DAIWER

■BSG-03, 06, 10

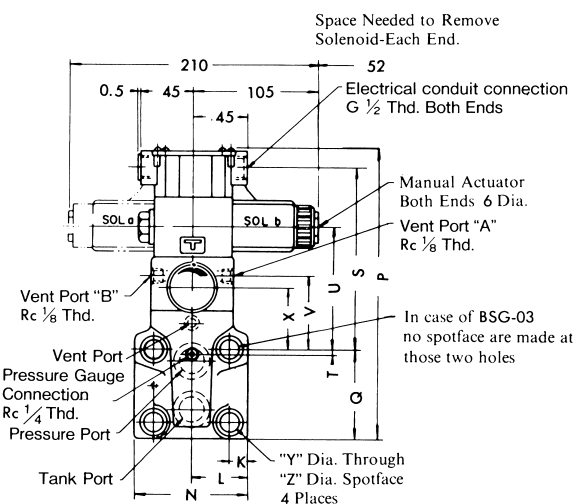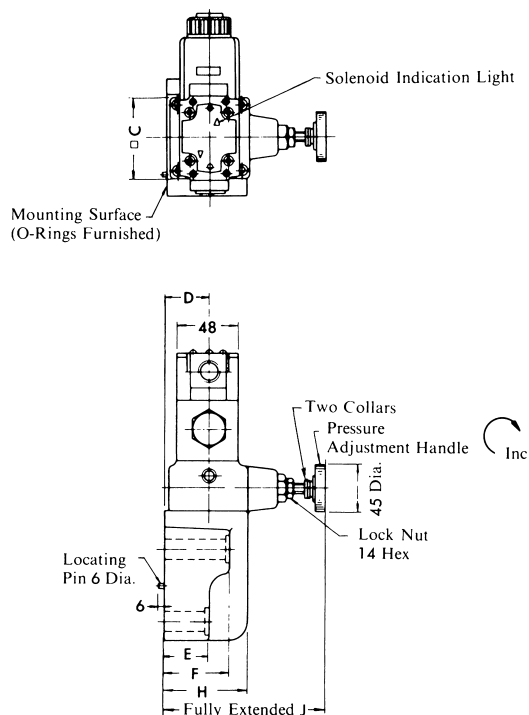

Model No.	C	D	E	F	H	J	K	L	N	P	Q	S	T	U	V	X	Y	Z
BSG-03	75	40	57	78	78	145	14.1	41	82	227.3	77	132	22	85	47	40	13.5	21
BSG-06	75	40	40	60	78	145	17	52	104	251.3	83.5	149.5	4.5	102.5	64.5	57.5	17.5	26
BSG-10	85	45	47	67	87.5	146	20.7	62	124	285.3	110	157	6	110	72	65	21.5	32

Solenoid Operated Relief Valve


DAIWER

■ Solenoid Operated Relief Valve




BSG-03-2P

■ JIS Graphical Symbol



BSG-03-2P



BSG-03-3P

■ Model Number Designation

BSG - 03 - ※ P

Series Number _____

Type of Connection _____

T: Threaded connection

G: Sub-Plate Mounting

Valve Size _____

 2 : Two Pressure
 3 : Three Pressure


BSG-03-3P


■ Mounting Bolt (Attachment)

Valve Model No.	Socket Head Cap Screw	Qty.
BSG-03-3P	M12X70 Lg, M12X95 Lg	2
BSG-06-3P	M16X60 Lg, M16X80 Lg	2
BSG-10-3P	M20X70 Lg, M20X90 Lg	2

■ Ratings

Valve Model No.	Max. Pressure	Pressure Adjustment Range	Max.Flow l/min	Piping Size Rc	Mass kg
BSG-03-3P	250 kgf/cm ²	5-250 kgf/cm ²	90	3/8"	7.6
BSG-06-3P			125	3/4"	8.5
BSG-10-3P			250	1 1/4"	11.9

■ BSG-03-3P
BSG-06-3P

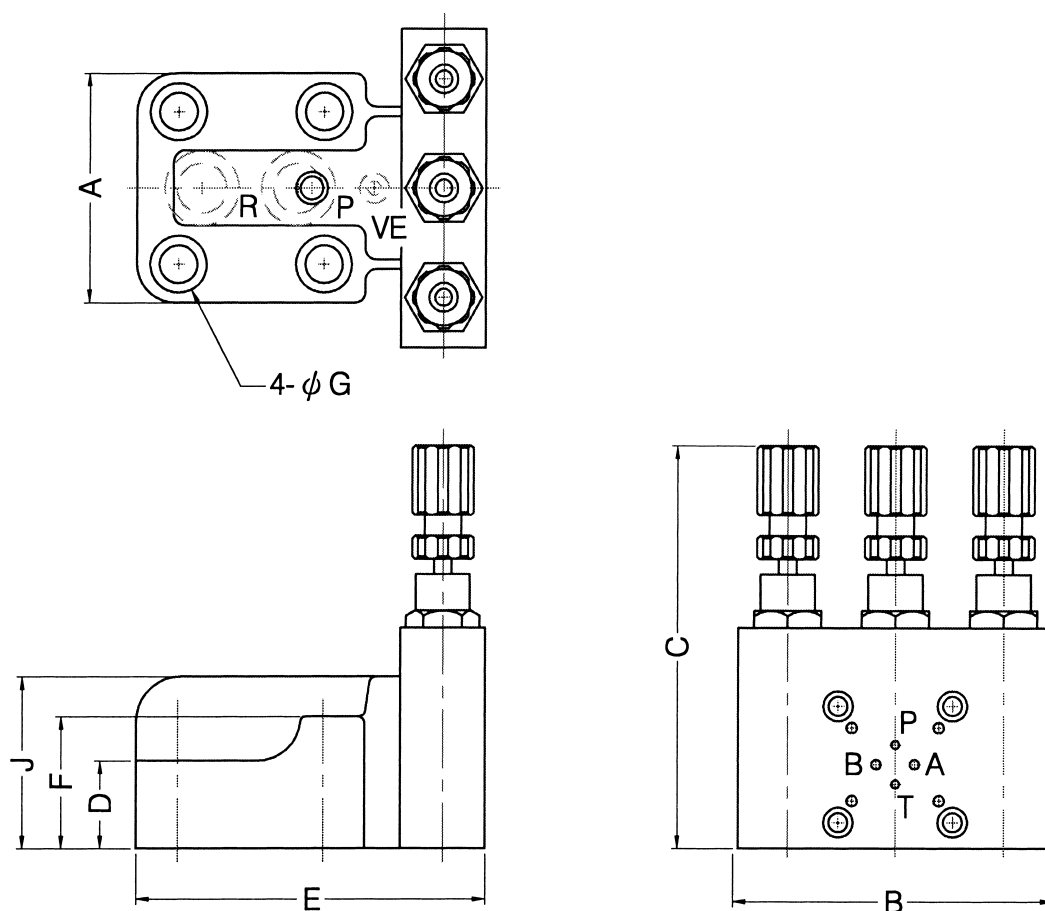

Model No.	A	B	C	D	E	F	G	J
BSG-03-3P	82	144.5	183	57	134	78	13	78
BSG-06-3P	104	144.5	183	40	160	60	13	78

● The install size of valve please refer the base seat drawing of type RVM-03,06